Technical brochure

Solenoid valves
Type EVRA 3-40 and EVRAT 10-20



EVRA is a direct or servo operated solenoid valve for liquid, suction and hot gas lines with ammonia or fluorinated refrigerants.

EVRA valves are supplied complete or as separate components, i.e. valve body, coil and flanges can be ordered separately.

EVRAT is an assisted lift, servo operated solenoid valve for liquid, suction and hot gas lines with ammonia and fluorinated refrigerants.

EVRAT is specially designed to open - and stay open - at a pressure drop of 0 bar/psig. The EVRAT solenoid valve is thus suitable for use in any system where the required opening differential pressure is 0 bar/psig.

EVRAT is available as components, i.e. valve body, flanges and coil must be ordered separately. EVRAT 10, 15 and 20 have a spindle for manual operation.

Features

- Can be used for all non-flammable refrigerants, including R 717, and non-corrosive gases/ liquids - assuming seals of correct material are used
- Teflon gasket ensures a very high tightness across valve seat
- Low pressure drop across valve
- Wide range of flanges with connection dimensions in accordance with standards: DIN ANSI, SOC, SA and FPT
- Large range of coils
- Strainer type FA can be mounted directly on the valve body except for EVRA 32 and 40.
- Certification: Please contact Danfoss for an updated list with type approvals for the products.

© Danfoss A/S (RC-MDP / MWA), 2014-04

Contents **Page**

Design 3
Approvals 3
Technical data 4
Ordering 7
Dimensions and weight 10
Nominal capacities 12
Coils for EVR valves 41
Coils for solenoid valves (ATEX) - Type BV 46

© Danfoss A/S (RC-MDP / MWA), 2014-04

Design

Connections
There is a wide range of connection possibilities with EVRA 3 to 25
- Welding DIN (2448)
- Welding ANSI (3/8 - 1½ in. B36, 10 schedule 80, 2 in. B36.10 schedule 40)
- Welding collar ANSI (B 16.11)
- Solder connection ANSI (B 16.22
- FPT internal thread, NPT (ANSI/ASME B 1.20.1)

EVRA 32 and 40 are supplied with integrated flanges for:
- Welding DIN (2448)
- Welding ANSI (B 36.10)

Types
EVRA 3 is a direct operated solenoid valve that opens directly for the flow when current is applied to the coil of the solenoid valve.

EVRA 10 to 20 are servo operated solenoid valves with "floating" diaphragm that needs a differential pressure of min. 0.05 bar/ 0.725 psi for operation. Differential pressure for operation for EVRAT 10 to 20 is 0 bar/psi.

EVRA 25 to 40 are servo operated piston valves that need a differential pressure of min. 0.07 bar/1 psi for operation.

Valve body
Ductile iron GJS-400-18-LT

Approvals

DNV, Det Norske Veritas, Norway

Polski Rejestr Statków, Poland

Pressure Equipment Directive (PED) (97/23/EC)(EVRA 32 and 40 CE marked according to PED)

UL-listed with GP coils

© Danfoss A/S (RC-MDP / MWA), 2014-04

Technical data

SI Units

Refrigerants

R 717 (NH_3), R 22, R 134a, R 404A, R 12, R 502 etc.

For ambient temperature and enclosure for coils

See "Coils for solenoid valves" page 42-47

Type	Opening differential pressure with standard coil Δp bar				Temperature of medium °C	Max. working pressure PB bar	k_v-value m^3/h
	Min.	Max. (= MOPD) liquid [1]					
		10 W a.c.	12 W a.c.	20 W d.c.			
EVRA 3	0.00	21	25	14	−40 → 105	42	0.23
EVRA 10	0.05	21	25	18			1.5
EVRAT 10	0.00	14	21	16			1.5
EVRA 15	0.05	21	25	18			2.7
EVRAT 15	0.00	14	21	16			2.7
EVRA 20	0.05	21	25	13			4.5
EVRAT 20	0.00	14	21	13			4.5
EVRA 25	0.20	21	25	14			10.0
EVRA 32	0.20	21	25	14			16.0
EVRA 40	0.20	21	25	14			25.0

The k_v value is the water flow in m^3/h at a pressure drop across valve of 1 bar, $\rho = 1000\ kg/m^3$.

[1]) MOPD for media in gas form is approx. 1 bar greater.

US Units

Temperature of medium

−40 → +221°F.

Max. 265°F during defrosting.

Type	Opening differential pressure with standard coil Δp bar				Temperature of medium °F	Max. working pressure PB psi	C_v-value gal
	Min.	Max. (= MOPD) liquid [1]					
		10 W a.c.	12 W a.c.	20 W d.c.			
EVRA 3	0.0	300	360	200	−40 → 220	609	0.27
EVRA 10	0.7	300	360	261			1.74
EVRAT 10	0.0	200	300	232			1.74
EVRA 15	0.7	300	360	261			3.14
EVRAT 15	0.00	200	300	232			3.14
EVRA 20	0.7	300	360	189			5.23
EVRAT 20	0.0	200	300	189			5.23
EVRA 25	3	300	360	200			11.6
EVRA 32	3	300	360	200			18.6
EVRA 40	3	300	360	200			20.0


The C_v value is the water flow in gal/min at a pressure drop across valve $\Delta p = 1$ psi, $\rho = 10$ lbs/gal

[1]) MOPD for media in gas form is approx. 14.5 psi greater.


© Danfoss A/S (RC-MDP / MWA), 2014-04

Design
Function


4. Coil
16. Armature
18. Valve plate / Pilot valve plate
20. Earth terminal
24. Connection for flexible steel hose
28. Gasket
29. Pilot orifice
30. O-ring
31. Piston ring
36. DIN plug
40. Terminal box
43. Valve cover
44. O-ring
45. Valve cover gasket
48. Flange gasket
49. Valve body
51. Cover / Threaded plug
53. Manual operation spindle
59. Strainer
73. Equalization hole
74. Main channel
75. Pilot channel
76. Compression spring
80. Diaphragm/Servo piston
82. Support washer
83. Valve seat
84. Main valve plate




EVRA 3

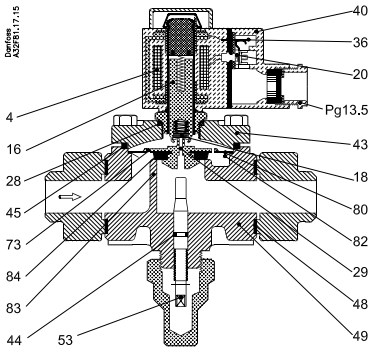

EVRA/T 10, 15 and 20

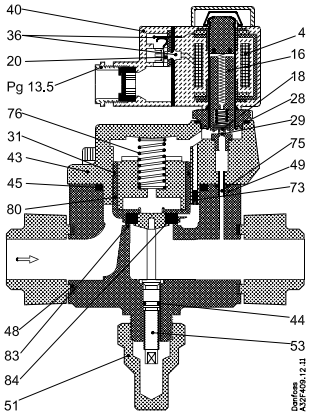

EVRA 25

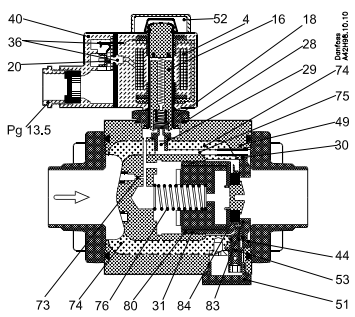

EVRA 32 and 40

EVRA solenoid valves are designed on two different principles:
1. Direct operation
2. Servo operation

1. Direct operation
EVRA 3 is direct operated. The valve opens direct for full flow when the armature (16) moves up into the magnetic field of the coil. This means that the valve operates with a min. differential pressure of 0 bar.
The teflon valve plate (18) is fitted direct on the armature (16).
Inlet pressure acts from above on the armature and the valve plate. Thus, inlet pressure, spring force and the weight of the armature act to close the valve when the coil is currentless.

2. Servo operation
EVRA/T 10 → 20 are servo operated with a "floating" diaphragm (80). The pilot orifice (29) of stainless steel is placed in the centre of the diaphragm. The teflon pilot valve plate (18) is fitted direct to the armature (16).
When the coil is currentless, the main orifice and pilot orifice are closed. The pilot orifice and main orifice are held closed by the weight of the armature, the armature spring force and the
differential pressure between inlet and outlet sides.


When current is applied to the coil the armature is drawn up into the magnetic field and opens the pilot orifice. This relieves the pressure above the diaphragm, i.e. the space above the diaphragm becomes connected to the outlet side of the valve.
The differential pressure between inlet and outlet sides then presses the diaphragm away from the main orifice and opens it for full flow. Therefore a certain minimum differential pressure is necessary to open the EVRA valve and keep it open. For diffential pressure 0 bar use EVRAT valves.
For EVRA 10 → 20 valves this differential pressure is 0.05 bar.
When current is switched off, the pilot orifice closes. Via the equalization holes (73) in the diaphragm, the pressure above the diaphragm then rises to the same value as the inlet pressure and the diaphragm closes the main orifice.

EVRA 25, 32 and 40 are servo operated piston valves. The valves are closed with currentless coil.
The servo piston (80) with main valve plate (84) closes against the valve seat (83) by means of the differential pressure between inlet and outlet side of the valve, the force of the compression spring (76) and possibly the piston weight.
When current to the coil is switched on, the pilot orifice (29) opens. This relieves the pressure on the piston spring side of the valve. The differential pressure will then open the valve.
The minimum differential pressure needed for full opening of the valves is 0.2 bar.


© Danfoss A/S (RC-MDP / MWA), 2014-04

Material specification

EVRA 3




EVRA/T 10/15/20

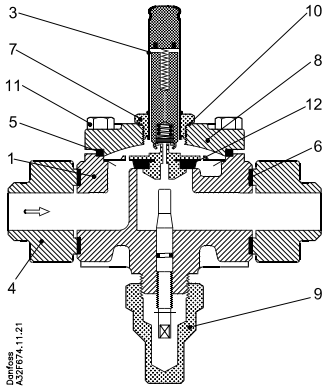


No.	Description	Solenoid valves	Material	Analysis	Mat.no.	W.no.	ISO	EN
1	Valve body	EVRA 3	Free-cutting steel	11MnPb30				10277-3
		EVRA/T 10/15/20	Cast-iron	GJS-400-18-LT				1563
3	Armature tube	EVRA 3/10/15/20	Stainless steel	X2CrNi19-11				10088
4	Flange	EVRA/T 3/10/15/20	Steel	S235JRG2				10025
5	Gasket	EVRA 3	Aluminium	Al 99.5				10210
		EVRA/T 10/15/20	Rubber	Cr				
6	Gasket	EVRA/T 3/10/15/20	asbestos-free					
7	Armature tube nut	EVRA/T 3/10/15/20	Stainless steel	X8CrNiS18-9				10088
8	Cover	EVRA/T 10/15/20	Cast-iron	GJS-400-18-LT				1563
9	Cover/ thread plug	EVRA/T 10/15/20	Free-cutting steel	11SMnPb30				10277-3
10	Gasket	EVRA/T 10/15/20	Aluminium	Al 99.5				10210
11	Bolts	EVRA/T 10/15/20	Stainless steel	A2-70			3506	
12	Valve seat	EVRA/T 10/15/20	Teflon (PTFE)					

EVRA 25

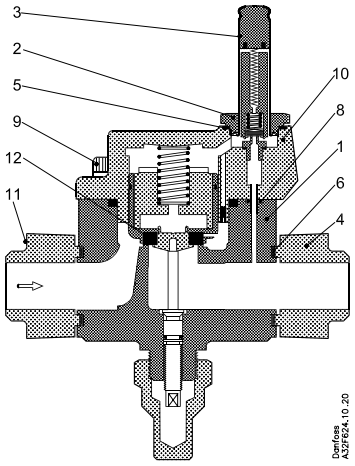


EVRA 32/40

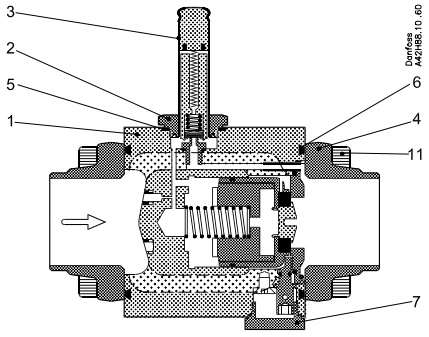

No.	Description	Solenoid valves	Material	Analysis	Mat.no.	W.no.	ISO	EN
1	Valve body	EVRA 25/32/40	Cast-iron	GJS-400-18-LT				1563
2	Armature tube nut	EVRA 25/32/40	Stainless steel	X8CrNiS 18-9				10088
3	Armature tube	EVRA 25/32/40	Stainless steel	X2CrNi19-11				10088
4	Flange	EVRA 25	Steel	S235JRG2				10025
		EVRA 32/40	Steel	P285QH				10222-4
5	Gasket	EVRA 25/32/40	Aluminium	Al 99.5				10210
6	Gasket	EVRA 25	asbestos-free					
		EVRA 32/40	Rubber	Cr				
7	Cover/thread plug	EVRA 25	Free-cutting steel	11SMnPb30				10277-3
		EVRA 32/40	Stainless steel	X5CrNi17-10				10088
8	Gasket	EVRA 25	Rubber	CR				
9	Bolts	EVRA 25	Stainless steel	A2-70			3506	
10	Cover	EVRA 25	Cast-iron	GJS-400-18-LT				1563
11	Bolts	EVRA 25/32/40	Stainless steel	A2-70			3506	
12	Valve seat	EVRA 25	Teflon (PTFE)					


© Danfoss A/S (RC-MDP / MWA), 2014-04

Ordering



Separate valve bodies, including flange gaskets and bolts

Type	Connection	Required coil type	**Code no.**
Valves with manual operation			
EVRA 10	See table *"Flange set"*	a.c./d.c.	**032F6210**
EVRAT 10		a.c./d.c.	**032F6214**
EVRA 15		a.c./d.c.	**032F6215**
EVRAT 15		a.c./d.d.	**032F6216**
EVRA 20		a.c.	**032F6220**
EVRA 20		a.c./d.c.	**032F6221**
EVRAT 20		a.c./d.c.	**032F6219**
EVRA 25		a.c./d.c.	**032F6225**



Separate valve bodies with butt weld connections

Type	Butt weld connection		**Code no.**
	DIN	ANSI	
Valves with manual operation			
EVRA 32		1 1/4 in.	**042H1140**
EVRA 32		1 ½ in.	**042H1141**
EVRA 40		1 ½ in.	**042H1142**
EVRA 40		2 in.	**042H1143**

Coils
See "Coils for solenoid valves", page 42-47

Accessories
Strainer FA for direct mounting, see "FA".

Flanges,
see the following pages.

Example
EVRA 15 valve body with manual operation,
code no. **032F6215**
+ 3/4 in. **ANSI** weld flange set, code no. **027N2022**
+ coil with terminal box, 115 V, 60 Hz,
code no. **018F6710**


© Danfoss A/S (RC-MDP / MWA), 2014-04

Ordering (continued)

Tongue/ tongue flange sets version 1.3

Used for:
EVRA 3, EVRA/T 10, EVRA/T 15
Each code no. includes two flanges

Separate flange gaskets,
ID 22 x OD 32 x 1.0 mm
(ID 0.866 x OD 1.260 x 0.039 in.):
Code no. 020-2133 (40 stk.). must be ordered separately

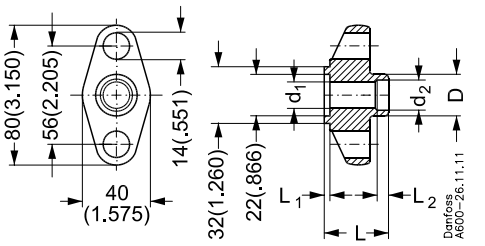

Butt welding ANSI B 36.10
Tongue flange sets

Connection		D	D	d_1	d_1	d_2	d_2	L	L	L_1	L_1	L_2	L_2	Code no.
mm	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm	in.	
10	3/8	17.1	0.673	10.7	0.421	10.7	0.421	32.5	1.280	3	0.118	6	0.236	**027N2020**
15	1/2	21.3	0.839	13.9	0.547	13.9	0.547	32.5	1.280	3	0.118	6	0.236	**027N2021**
20	3/4	26.9	1.059	18.9	0.744	18.9	0.744	32.5	1.280	3	0.118	6	0.236	**027N2022**

Socket welding ANSI (B 16.11)
Tongue flange sets

Connection		D	D	d_1	d_1	d_2	d_2	L	L	L_1	L_1	L_2	L_2	Code no.
mm	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm	in.	
10	3/8	26	1.024	12.5	0.492	17.8	0.701	32.5	1.280	3	0.118	10	0.394	**027N2010**
15	1/2	31.6	1.244	15.8	0.622	22	0.866	32.5	1.280	3	0.118	10	0.394	**027N2011**

FPT internal thread, NPT (ANSI / ASME B 1.20.1)
Tongue flange sets

Connection		D	D	d_1	d_1	d_2	d_2	L	L	L_1	L_1	Code no.
mm	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm	in.	
10	3/8	26	1.024	14.3	0.563	3/8"-18 NPT	3/8"-18 NPT	32.5	1.477	3	0.118	**027G1005**
15	1/2	31.6	1.244	17.8	0.701	1/2"-14 NPT	1/2"-14 NPT	32.5	1.280	3	0.118	**027G1006**

Solder ANSI B 16.22
Tongue flange sets

Connection		D	D	d_1	d_1	d_2	d_2	L	L	L_1	L_1	L_2	L_2	Code no.
	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm	in.	
	5/8	21	0.827	13	0.512	15.9	0.626	29.5	1.161	3	0.118	20.5	0.807	**027L1117**
	7/8	27	1.063	19	0.748	22.2	0.874	29.5	1.161	3	0.118	22	0.866	**027L1123**

Separate flange gaskets,
ID 22 x OD 32 x 1.0 mm
(ID 0.866 x OD 1.260 x 0.039 in.):
Code no. 020-2133 (40 pcs). must be ordered separately


© Danfoss A/S (RC-MDP / MWA), 2014-04

Ordering (continued)

Tongue/ tongue flange sets version 3

Used for
EVRA/T 20, EVRA 25
Each code no. includes two flanges.

Separate flange gaskets,
ID 29 x OD 39 x 1.5 mm
(ID 1.142 x OD 1.535 x 0.059 in.)

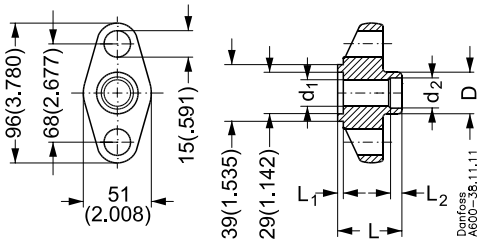

Butt welding ANSI B 36.10
Tongue flange sets

Connection		D	D	d_1	d_1	d_2	d_2	L	L	L_1	L_1	L_2	L_2	Code no.
mm	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm	in.	
20	3/4	26.9	1.059	18.9	0.744	18.9	0.744	33	1.299	3	0.118	6	0.236	**027N3031**
25	1	33.7	1.327	24.5	0.965	24.5	0.965	37.5	1.476	3	0.118	6	0.236	**027N3032**
32	1 1/4	42.4	1.669	26	1.024	32.6	1.283	37.5	1.476	3	0.118	6	0.236	**027N3033**

Socket welding ANSI (B 16.11)
Tongue flange sets

Connection		D	D	d_1	d_1	d_2	d_2	L	L	L_1	L_1	L_2	L_2	Code no.
mm	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm	in.	
20	3/4	37.4	1.472	21	0.827	27.4	1.079	33	1.299	3	0.118	13	0.512	**027N2001**
25	1	45.6	1.795	26.6	1.047	34.1	1.343	33	1.299	3	0.118	13	0.512	**027N2002**

FPT internal thread, NPT (ANSI / ASME B 1.20.1)
Tongue flange sets

Connection		D	D	d_1	d_1	d_2	d_2	L	L	L_1	L_1	Code no.
mm	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm	in.	
20	3/4	37.4	1.472	23	0.906	3/4"-14 NPT	3/4"-14 NPT	33	1.299	3	0.118	**027G1001**
25	1	45.6	1.795	29	1.142	1"-11.5 NPT	1"-11.5 NPT	33	1.299	3	0.118	**027G1002**


Soldering ANSI B 16.22
Tongue flange sets

Connection		D	D	d_1	d_1	d_2	d_2	L	L	L_1	L_1	L_2	L_2	
	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm	in.	
	7/8	34	1.338	19	0.748	22.2	0.874	32	1.260	4	0.157	16.5	0.650	**027L1223**
	1 1/8	34	1.338	26	1.024	28.6	1.126	34	1.338	4	0.157	26	1.024	**027L1229**


Separate flange gaskets,
ID 29 x OD 39 x 1.5 mm
(ID 1.142 x OD 1.535 x 0.059 in.)
Code no. 027F2175 (40 pcs.). must be ordered separately

© Danfoss A/S (RC-MDP / MWA), 2014-04


Dimensions and weight




EVRA 3
Coil with cable




EVRA 3 → 20
Coil with DIN plugs



EVRA 3 → 20
Coil with terminal box

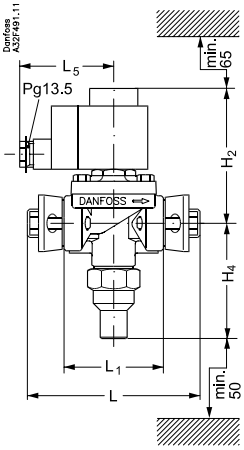

EVRA/T 10 → 20
Coil with terminal box



EVRA 10
Coil with terminal box

Weight of coil
10 W: approx. 0.3 kg/ 0.66 lb
12 and 20 W: approx. 0.5 kg/ 1.1 lb


Weight of flange set
For EVRA 3, 10 and 15: 0.6 kg/ 1.3 lb
For EVRA 20: 0.9 kg/ 2.0 lb

Type		H_1	H_2	H_3	H_4	L	L_1	L_5 max.		B	B_1 max.	Weight [1]	
								10 W	12/20 W			kg	lb
EVRA 3	mm		84	19		124	65	75	85	80	68	1.2	2.6
	in.		3.46	0.75		4.88	2.56	2.95	3.35	3.15	2.67		
EVRA/T 10	mm	22	100		81	130	68	75	85	80	68	1.7	3.7
	in.	0.9	3.94		3.19	5.12	2.68	2.95	3.35	3.15	2.67		
EVRA/T 15	mm		100		81	130	68	75	85	80	68	1.8	4.0
	in.		3.94		3.19	5.12	2.68	2.95	3.35	3.15	2.67		
EVRA/T 20	mm		110		77	155	85	75	85	96	68	2.7	5.9
	in.		3.94		3.03	6.10	3.35	2.95	3.35	3.78	2.67		


[1]) With coil, without flanges

© Danfoss A/S (RC-MDP / MWA), 2014-04


Dimensions and weight
(continued)




EVRA 25, 32 and 40
Coil with cable




EVRA 25, 32 and 40
Coil with DIN plugs

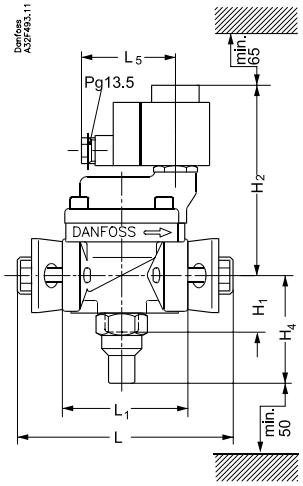


EVRA 25
Coil with terminal box



EVRA 25
Coil with terminal box

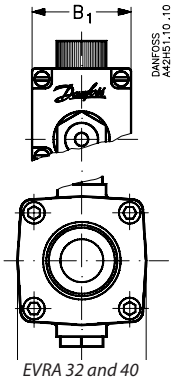

EVRA 32 and 40
Coil with terminal box

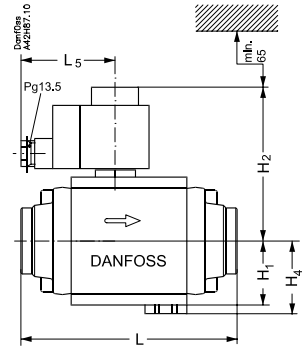

EVRA 32 and 40
Coil with terminal box

Weight of coil
10 W: approx. 0.3 kg / 0.66 lb
12 and 20 W: approx. 0.5 kg/ 1.1 lb

Weight of flange set
For EVRA 25: 0.9 kg/ 2 lb

Type		H_1	H_2	H_3	H_4	L	L_1	L_5 max.		B	B_1 max.	Weight [1]	
								10 W	12/20 W			kg	lb
EVRA 25	mm	46	141		78	162	92	75	75	95	68	3.0	6.6
	in.	1.85	5.55		3.07	6.38	3.62	2.95	3.74	3.74	2.68		
EVRA 32	mm	47	115		53	175		75	80	80	68	4.0	8.8
	in.	1.85	4.53		2.09	6.89		2.95	3.15	3.15	2.68		
EVRA 40	mm	47	115		53	175		75	80	80	68	4.0	8.8
	in.	1.85	4.53		2.09	6.89		2.95	3.15	3.15	2.68		

[1]) With coil, without flanges


© Danfoss A/S (RC-MDP / MWA), 2014-04


Nominal capacities

Liquid line

Location of valve in system (marked with grey)


Pump

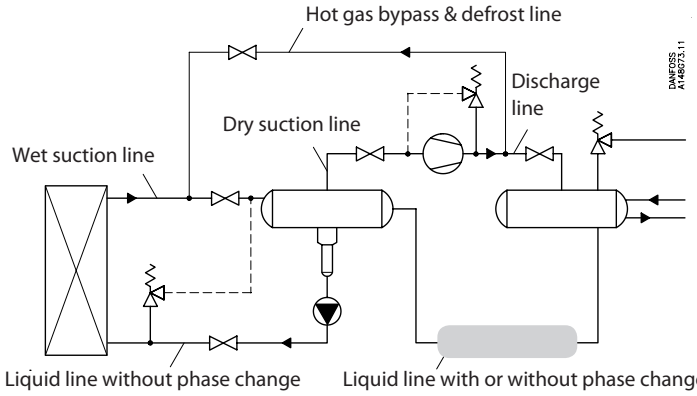




Location of valve in system (marked with grey)


Gravity

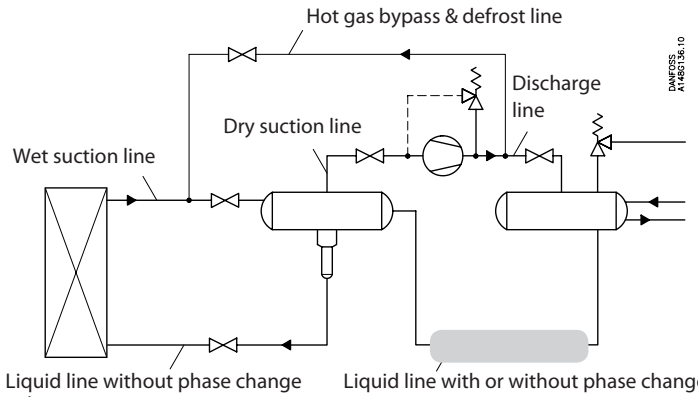




Location of valve in system (marked with grey)

DX

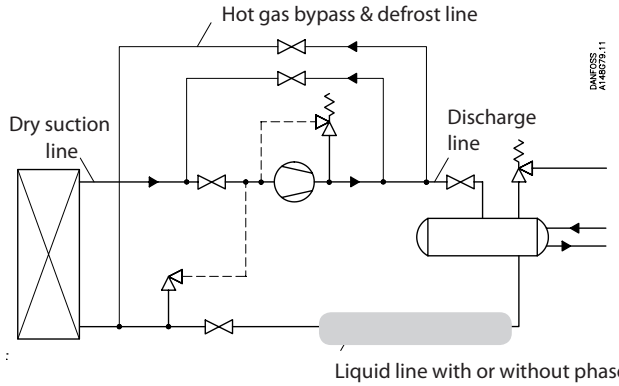



© Danfoss A/S (RC-MDP / MWA), 2014-04

Nominal capacities

Liquid line

SI units

Calculation example (R 22 capacities):

Running conditions in a plant are as follows:
T_e = –20°C
Q_0 = 300 kW
T_{liq} = 10°C
Max. ΔP = 0.3 bar

The capacity table is based on nominal conditions (ΔP = 0.2 bar, T_{liq} = 30°C).

The actual capacity must therefore be corrected to a nominal condition by multiplication with correction factors.

Correction factor for Δp 0.3 bar $f_{\Delta P}$ = 0.82.

Correction factor for liquid temperature f_{Tliq} = 0.86.

$Q_n = Q_o \text{´} f_{\Delta P} \times f_{Tliq} = 300 \times 0.82 \times 0.86$
= 212 kW.

From the capacity table an EVRA 25 with Q_n = 217 kW is the correct selection for the application.

US units

Calculation example (R 22 capacities):

Running conditions in a plant are as follows:
T_e = –20°F
Q_o = 100 TR
T_{liq} = 50°F
Max. ΔP = 5 psi

The capacity table is based on nominal conditions (ΔP = 3 psi, T_{liq} = 90°F).

The actual capacity must therefore be corrected to a nominal condition by multiplication with correction factors.

Correction factor for ΔP 5 psi, $f_{\Delta P}$ = 0.79

Correction factor for liquid temperature = 50°F, f_{Tliq} = 0.87.

$Q_n = Q_o \times f_{\Delta P} \times f_{Tliq} = 100 \times 0.79 \times 0.87$
= 69 TR

From the capacity table an EVRA 25 with Q_n = 61 TR is the correct selection for the application.

© Danfoss A/S (RC-MDP / MWA), 2014-04

Nominal capacities

Liquid line

SI units

Capacity table for nominal conditions, Q_N [kW],
T_{liq} = 30°C,
ΔP = 0.2 bar

R 717

Type	k_v	Evaporating temperature T_e						
	m^3/h	–40°C	–30°C	–20°C	–10°C	–0°C	10°C	20°C
EVRA 3	0.23	23.2	23.5	23.8	24.1	24.1	24.5	24.7
EVRA/T 10	1.5	151.1	153.3	155.0	157.2	158.9	160.0	161.1
EVRA/T 15	2.7	272.0	276.0	279.0	283.0	286.0	288.0	290.0
EVRA/T 20	4.5	453.3	460.0	465.0	471.7	476.7	480.0	483.3
EVRA 25	10.0	1007.4	1022.2	1033.3	1048.1	1059.3	1066.7	1074.1
EVRA 32	16.0	1611.9	1635.6	1653.3	1677.0	1694.8	1706.7	1718.5
EVRA 40	25	2518.5	2555.6	2583.3	2620.4	2648.1	2666.7	2685.2

Correction factor for ΔP ($f_{\Delta P}$)

ΔP (bar)	Correction factor
0.2	**1.00**
0.25	0.89
0.3	0.82
0.4	0.71
0.5	0.63
0.6	0.58

Correction factor for liquid temperature (T_{liq})

Liquid temperature	Correction factor
–20°C	0.82
–10°C	0.86
0°C	0.88
10°C	0.92
20°C	0.96
30°C	**1.00**
40°C	1.04
50°C	1.09

US units

Capacity table for nominal conditions, Q_N [Tons of Refrigeration],
T_{liq} = 90°F,
ΔP = 3 psi

R 717

Type	C_v	Evaporating temperature T_e						
	USgal/min	–40°F	–20°F	0°F	20°F	40°F	60°F	80°F
EVRA 3	0.26	6.6	6.7	6.7	6.8	6.9	7.0	7.0
EVRA/T 10	1.72	43.3	43.8	43.8	44.4	44.9	45.5	46.0
EVRA/T 15	3.1	78.0	79.0	79.0	80.0	81.0	82.0	83.0
EVRA/T 20	5.16	129.8	131.5	131.5	133.2	134.8	136.5	138.2
EVRA 25	11.44	287.8	291.5	291.5	295.2	298.9	302.6	306.3
EVRA 32	18.35	461.7	467.6	467.6	473.5	479.5	485.4	491.3
EVRA 40	28.7	722.1	731.4	731.4	740.6	740.9	759.2	768.4

Correction factor for ΔP ($f_{\Delta P}$)

ΔP (psi)	Correction factor
3	**1.00**
4	0.87
5	0.79
6	0.72
7	0.66
8	0.62

Correction factor for liquid temperature (T_{liq})

Liquid temperature	Correction factor
–10°F	0.82
10°F	0.86
30°F	0.88
50°F	0.92
70°F	0.96
90°F	**1.00**
110°F	1.04
130°F	1.09

© Danfoss A/S (RC-MDP / MWA), 2014-04

Nominal capacities

Liquid line

SI units

Capacity table for nominal conditions, Q_N [kW],
T_{liq} = 30°C,
ΔP = 0.2 bar

R 22

Type	k_v	Evaporating temperature T_e						
	m^3/h	–40°C	–30°C	–20°C	–10°C	–0°C	10°C	20°C
EVRA 3	0.23	4.7	4.9	5.0	5.1	5.2	5.4	5.5
EVRA/T 10	1.5	30.8	31.7	32.6	33.4	34.2	34.9	35.6
EVRA/T 15	2.7	55.5	57.1	58.7	60.2	61.6	62.9	64.0
EVRA/T 20	4.5	92.5	95.2	97.8	100.3	102.7	104.8	106.7
EVRA 25	10.0	205.6	211.5	217.4	223.0	228.1	233.0	237.0
EVRA 32	16.0	328.9	338.4	347.9	356.7	365.0	372.7	379.3
EVRA 40	25	513.9	528.7	543.5	557.4	570.4	582.4	592.6

Correction factor for ΔP ($f_{\Delta P}$)

ΔP (bar)	Correction factor
0.2	**1.00**
0.25	0.89
0.3	0.82
0.4	0.71
0.5	0.63
0.6	0.58

Correction factor for liquid temperature (T_{liq})

Liquid temperature	Correction factor
–20°C	0.71
–10°C	0.75
0°C	0.80
10°C	0.86
20°C	0.92
30°C	**1.00**
40°C	1.09
50°C	1.22

US units

Capacity table for nominal conditions, Q_N [Tons of Refrigeration],
T_{liq} = 90°F,
ΔP = 3 psi

R 22

Type	C_v	Evaporating temperature T_e						
	USgal/min	–40°F	–20°F	0°F	20°F	40°F	60°F	80°F
EVRA 3	0.26	1.3	1.4	1.4	1.5	1.5	1.5	1.6
EVRA/T 10	1.72	8.8	9.1	9.2	9.5	9.8	9.9	10.1
EVRA/T 15	3.1	15.8	16.4	16.7	17.1	17.6	17.9	18.3
EVRA/T 20	5.16	26.3	27.3	27.7	28.5	29.3	29.8	30.5
EVRA 25	11.44	58.3	60.5	61.4	63.1	64.9	66.1	67.5
EVRA 32	18.35	94.8	98.4	99.9	102.6	105.6	107.4	109.8
EVRA 40	28.7	147.8	153.4	155.8	160.0	164.6	167.5	171.2

Correction factor for ΔP ($f_{\Delta P}$)

ΔP (psi)	Correction factor
3	**1.00**
4	0.87
5	0.79
6	0.72
7	0.66
8	0.62

Correction factor for liquid temperature (T_{liq})

Liquid temperature	Correction factor
–10°F	0.73
10°F	0.77
30°F	0.82
50°F	0.87
70°F	0.93
90°F	**1.00**
110°F	1.09
130°F	1.20

© Danfoss A/S (RC-MDP / MWA), 2014-04

Nominal capacities

Liquid line

SI units

Capacity table for nominal conditions, Q_N [kW],
T_{liq} = 30°C,
ΔP = 0.2 bar

R 134a

Type	k_v	Evaporating temperature T_e						
	m^3/h	–40°C	–30°C	–20°C	–10°C	–0°C	10°C	20°C
EVRA 3	0.23	4.1	4.3	4.5	4.7	4.9	5.1	5.2
EVRA/T 10	1.5	26.8	28.1	29.4	30.6	31.8	33.0	34.1
EVRA/T 15	2.7	48.3	50.6	52.9	55.1	57.3	59.4	61.4
EVRA/T 20	4.5	80.5	84.3	88.2	91.8	95.5	99.0	102.3
EVRA 25	10.0	178.9	187.4	195.9	204.1	212.2	220.0	227.4
EVRA 32	16.0	286.2	299.9	313.5	326.5	339.6	352.0	363.9
EVRA 40	25	447.2	468.5	489.8	510.2	530.6	550.0	568.5

Correction factor for ΔP ($f_{\Delta P}$)

ΔP (bar)	Correction factor
0.2	**1.00**
0.25	0.89
0.3	0.82
0.4	0.71
0.5	0.63
0.6	0.58

Correction factor for liquid temperature (T_{liq})

Liquid temperature	Correction factor
–20°C	0.66
–10°C	0.70
0°C	0.76
10°C	0.82
20°C	0.90
30°C	**1.00**
40°C	1.13
50°C	1.29

US units

Capacity table for nominal conditions, Q_N [Tons of Refrigeration],
T_{liq} = 90°F,
ΔP = 3 psi

R 134a

Type	C_v	Evaporating temperature T_e						
	USgal/min	–40°F	–20°F	0°F	20°F	40°F	60°F	80°F
EVRA 3	0.26	1.1	1.2	1.3	1.3	1.4	1.4	1.5
EVRA/T 10	1.72	7.5	7.9	8.3	8.7	9.1	9.4	9.8
EVRA/T 15	3.1	13.5	14.3	15.0	15.7	16.4	17.0	17.7
EVRA/T 20	5.16	22.5	23.7	24.9	26.1	27.3	28.3	29.4
EVRA 25	11.44	49.9	52.6	55.3	57.9	60.5	62.8	65.1
EVRA 32	18.35	81.1	85.6	89.9	94.2	98.3	102.2	105.9
EVRA 40	28.7	126.5	133.4	140.1	146.9	153.3	159.3	165.1

Correction factor for ΔP ($f_{\Delta P}$)

ΔP (psi)	Correction factor
3	**1.00**
4	0.87
5	0.79
6	0.72
7	0.66
8	0.62

Correction factor for liquid temperature (T_{liq})

Liquid temperature	Correction factor
–10°F	0.64
10°F	0.68
30°F	0.74
50°F	0.81
70°F	0.89
90°F	**1.00**
110°F	1.15
130°F	1.35

© Danfoss A/S (RC-MDP / MWA), 2014-04

Nominal capacities

Liquid line

SI units

Capacity table for nominal conditions, Q_N [kW],
T_{liq} = 30°C,
ΔP = 0.2 bar

R 404A

Type	k_v	Evaporating temperature T_e						
	m^3/h	–40°C	–30°C	–20°C	–10°C	–0°C	10°C	20°C
EVRA 3	0.23	2.8	3.0	3.2	3.4	3.5	3.7	3.8
EVRA/T 10	1.5	18.5	19.7	20.9	22.1	23.1	24.2	25.1
EVRA/T 15	2.7	33.3	35.5	37.7	39.7	41.6	43.5	45.1
EVRA/T 20	4.5	55.5	59.2	62.8	66.2	69.3	72.5	75.2
EVRA 25	10.0	123.3	131.5	139.4	147.0	154.1	161.1	167.0
EVRA 32	16.0	197.3	210.4	223.1	235.3	246.5	257.8	267.3
EVRA 40	25	308.3	328.7	348.6	367.6	385.2	402.8	417.6

Correction factor for ΔP ($f_{\Delta P}$)

ΔP (bar)	Correction factor
0.2	**1.00**
0.25	0.89
0.3	0.82
0.4	0.71
0.5	0.63
0.6	0.58

Correction factor for liquid temperature (T_{liq})

Liquid temperature	Correction factor
–20°C	0.55
–10°C	0.60
0°C	0.66
10°C	0.74
20°C	0.85
30°C	**1.00**
40°C	1.23
50°C	1.68

US units

Capacity table for nominal conditions, Q_N [Tons of Refrigeration],
T_{liq} = 90°F,
ΔP = 3 psi

R 404A

Type	C_v	Evaporating temperature T_e						
	USgal/min	–40°F	–20°F	0°F	20°F	40°F	60°F	80°F
EVRA 3	0.26	0.8	0.8	0.9	0.9	1.0	1.0	1.1
EVRA/T 10	1.72	5.1	5.5	5.8	6.2	6.5	6.8	7.1
EVRA/T 15	3.1	9.2	9.9	10.5	11.2	11.8	12.3	12.8
EVRA/T 20	5.16	15.3	16.4	17.5	18.6	19.6	20.5	21.3
EVRA 25	11.44	33.9	36.5	38.9	41.3	43.5	45.5	47.2
EVRA 32	18.35	55.1	59.3	63.2	67.1	70.7	74.0	76.8
EVRA 40	28.7	85.9	92.4	98.6	104.6	110.3	115.4	119.7

Correction factor for ΔP ($f_{\Delta P}$)

ΔP (psi)	Correction factor
3	**1.00**
4	0.87
5	0.79
6	0.72
7	0.66
8	0.62

Correction factor for liquid temperature (T_{liq})

Liquid temperature	Correction factor
–10°F	0.52
10°F	0.57
30°F	0.63
50°F	0.72
70°F	0.83
90°F	**1.00**
110°F	1.29
130°F	1.92


© Danfoss A/S (RC-MDP / MWA), 2014-04


Nominal capacities

Dry suction line

Pump


Location of valve in system (marked with grey)

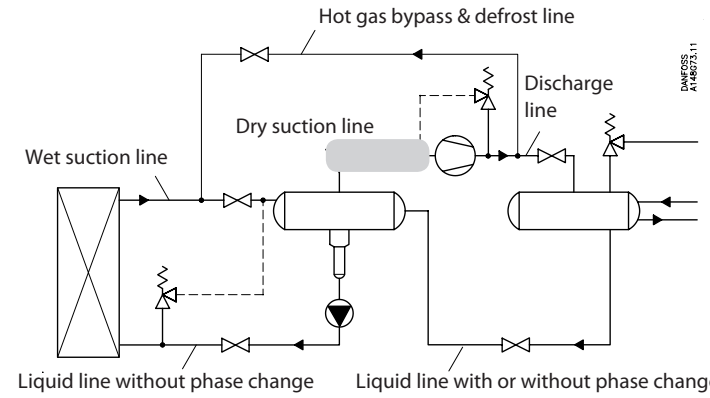




Gravity


Location of valve in system (marked with grey)

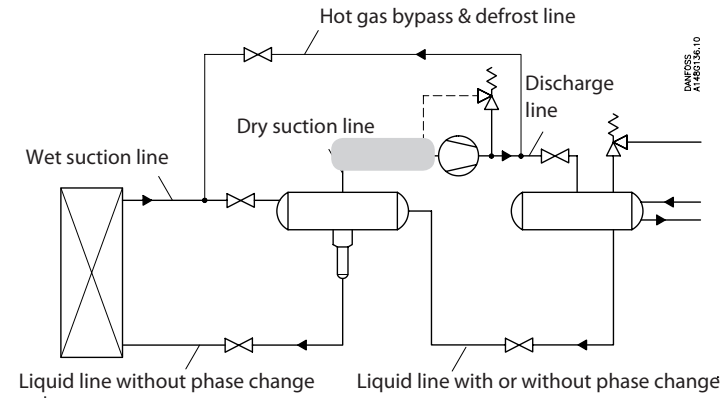




DX

Location of valve in system (marked with grey)

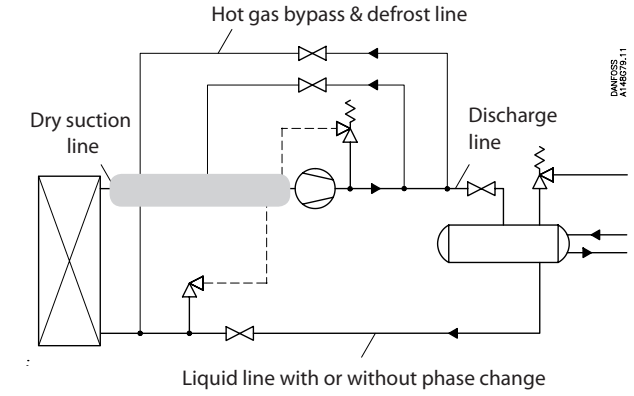



© Danfoss A/S (RC-MDP / MWA), 2014-04

Nominal capacities

Dry suction line

SI units

Calculation example (R 22 capacities):

Running conditions in a plant are as follows:

T_e = –20°C
Q_0 = 40 kW
T_{liq} = 10°C
T_s = 6°C
Max. ΔP = 0.3 bar

The capacity table is based on nominal conditions (pressure drop ΔP = 0.2 bar, T_{liq} = 30°C).

The actual capacity must therefore be corrected to a nominal condition by multiplication with correction factors.

Correction factor for ΔP 0.3 bar $f_{\Delta P}$ = 0.82

Correction factor for liquid temperature f_{Tliq} = 0.86

$Q_n = Q_0 \times f_{\Delta P} \times f_{Tliq} \times f_{Ts}$
$= 40 \times 0.82 \times 0.86 = 28.2$ kW

From the capacity table an EVRA 32 with Q_n = 33 kW is the correct selection for the application.

US units

Calculation example (R 22 capacities):

Running conditions in a plant are as follows:

T_e = 0°F
Q_0 = 20 TR
T_{liq} = 50°F
T_s = 10°F
Max. ΔP = 5 psi

The capacity table is based on nominal conditions (pressure drop ΔP = 3 psi, T_{liq} = 90°F)

The actual capacity must therefore be corrected to a nominal condition by multiplication with correction factors.

Correction factor for ΔP 5 psi $f_{\Delta p}$ = 0.79

Correction factor for liquid temperature = 50°F, f_{Tliq} = 0.87

$Q_n = Q_0 \times f_{\Delta P} \times f_{Tliq} \times f_{Ts}$
$= 20 \times 0.79 \times 0.87 = 13.7$ TR

From the capacity table a EVRA 40 with Q_n = 15 TR is the correct selection for the application.

© Danfoss A/S (RC-MDP / MWA), 2014-04

Nominal capacities

Dry suction line

SI units

Capacity table for nominal conditions, Q_N [kW],
T_{liq} = 30°C,
ΔP = 0.2 bar

R 717

Type	k_v	Evaporating temperature T_e						
	m^3/h	–40°C	–30°C	–20°C	–10°C	–0°C	10°C	20°C
EVRA 3	0.23	0.77	0.99	1.25	1.54	1.87	2.25	2.65
EVRA/T 10	1.5	5.01	6.46	8.15	10.06	12.22	14.66	17.28
EVRA/T 15	2.7	9.02	11.63	14.67	18.10	22.00	26.38	31.10
EVRA/T 20	4.5	15.03	19.38	24.45	30.17	36.67	43.97	51.83
EVRA 25	10.0	33.41	43.07	54.33	67.04	81.48	97.70	115.19
EVRA 32	16.0	53.45	68.92	86.93	107.26	130.37	156.33	184.30
EVRA 40	25	83.52	107.69	135.83	167.59	203.70	244.26	287.96

Correction factor for ΔP ($f_{\Delta P}$)

ΔP (bar)	Correction factor
0.2	**1.00**
0.25	0.89
0.3	0.82
0.4	0.71
0.5	0.63
0.6	0.58

Correction factor for superheat (T_s)

T_s	Correction factor
6°C	1.00
8°C	1.00
10°C	1.00
12°C	1.00

Correction factor for liquid temperature (T_{liq})

Liquid temperature	Correction factor
–20°C	0.82
–10°C	0.86
0°C	0.88
10°C	0.92
20°C	0.96
30°C	**1.00**
40°C	1.04
50°C	1.09

US units

Capacity table for nominal conditions, Q_N [Tons of Refrigeration],
T_{liq} = 90°F,
ΔP = 3 psi

R 717

Type	C_v	Evaporating temperature T_e						
	USgal/min	–40°F	–20°F	0°F	20°F	40°F	60°F	80°F
EVRA 3	0.26	0.22	0.29	0.37	0.47	0.58	0.70	0.84
EVRA/T 10	1.72	1.43	1.90	2.44	3.07	3.79	4.59	5.48
EVRA/T 15	3.1	2.58	3.42	4.40	5.54	6.84	8.28	9.88
EVRA/T 20	5.16	4.29	5.69	7.32	9.22	11.39	13.78	16.45
EVRA 25	11.44	9.52	12.62	16.24	20.44	25.24	30.56	36.46
EVRA 32	18.35	15.27	20.24	26.05	32.79	40.49	49.01	58.48
EVRA 40	28.7	23.89	31.66	40.74	51.29	63.33	76.66	91.47

Correction factor for ΔP ($f_{\Delta P}$)

ΔP (psi)	Correction factor
3	**1.00**
4	0.87
5	0.79
6	0.72
7	0.66
8	0.62

Correction factor for superheat (T_s)

T_s	Correction factor
10°F	1.00
14°F	1.00
18°F	1.00
20°F	1.00

Correction factor for liquid temperature (T_{liq})

Liquid temperature	Correction factor
–10°F	0.82
10°F	0.85
30°F	0.88
50°F	0.92
70°F	0.96
90°F	**1.00**
110°F	1.04
130°F	1.09

© Danfoss A/S (RC-MDP / MWA), 2014-04

Nominal capacities

Dry suction line

SI units

Capacity table for nominal conditions, Q_N [kW],
T_{liq} = 30°C,
ΔP = 0.2 bar

R 22

Type	k_v	Evaporating temperature T_e						
	m^3/h	–40°C	–30°C	–20°C	–10°C	–0°C	10°C	20°C
EVRA 3	0.23	0.3	0.4	0.5	0.6	0.7	0.8	1.0
EVRA/T 10	1.5	2.0	2.5	3.1	3.8	4.6	5.5	6.5
EVRA/T 15	2.7	3.6	4.5	5.7	6.9	8.3	9.9	11.6
EVRA/T 20	4.5	6.0	7.6	9.4	11.5	13.9	16.5	19.4
EVRA 25	10.0	13.3	16.8	20.9	25.6	30.8	36.6	43.1
EVRA 32	16.0	21.2	26.9	33.5	40.9	49.3	58.6	68.9
EVRA 40	25	33.1	42.0	52.3	63.9	77.0	91.6	107.7

Correction factor for ΔP ($f_{\Delta P}$)

ΔP (bar)	Correction factor
0.2	**1.00**
0.25	0.89
0.3	0.82
0.4	0.71
0.5	0.63
0.6	0.58

Correction factor for superheat (T_s)

T_s	Correction factor
6°C	1.00
8°C	1.00
10°C	1.00
12°C	1.00

Correction factor for liquid temperature (T_{liq})

Liquid temperature	Correction factor
–20°C	0.71
–10°C	0.75
0°C	0.80
10°C	0.86
20°C	0.92
30°C	**1.00**
40°C	1.09
50°C	1.22

US units

Capacity table for nominal conditions, Q_N [Tons of Refrigeration],
T_{liq} = 90°F,
ΔP = 3 psi

R 22

Type	C_v	Evaporating temperature T_e						
	USgal/min	–40°F	–20°F	0°F	20°F	40°F	60°F	80°F
EVRA 3	0.26	0.1	0.1	0.1	0.2	0.2	0.3	0.3
EVRA/T 10	1.72	0.6	0.7	0.9	1.2	1.4	1.7	2.0
EVRA/T 15	3.1	1.0	1.3	1.7	2.1	2.6	3.1	3.7
EVRA/T 20	5.16	1.7	2.2	2.8	3.5	4.3	5.1	6.1
EVRA 25	11.44	3.7	4.9	6.2	7.7	9.4	11.4	13.5
EVRA 32	18.35	6.1	7.9	10.1	12.5	15.4	18.5	22.0
EVRA 40	28.7	9.4	12.3	15.7	19.6	23.9	28.8	34.2

Correction factor for ΔP ($f_{\Delta P}$)

ΔP (psi)	Correction factor
3	**1.00**
4	0.87
5	0.79
6	0.72
7	0.66
8	0.62

Correction factor for superheat (T_s)

T_s	Correction factor
10°F	1.00
14°F	1.00
18°F	1.00
20°F	1.00

Correction factor for liquid temperature (T_{liq})

Liquid temperature	Correction factor
–10°F	0.73
10°F	0.77
30°F	0.82
50°F	0.87
70°F	0.93
90°F	**1.00**
110°F	1.09
130°F	1.20

© Danfoss A/S (RC-MDP / MWA), 2014-04

Nominal capacities

Dry suction line

SI units

Capacity table for nominal conditions, Q_N [kW],
T_{liq} = 30°C,
ΔP = 0.2 bar

R 134a

Type	k_v	Evaporating temperature T_e						
	m^3/h	–40°C	–30°C	–20°C	–10°C	–0°C	10°C	20°C
EVRA 3	0.23	0.2	0.3	0.3	0.4	0.5	0.7	0.8
EVRA/T 10	1.5	1.3	1.8	2.3	2.9	3.6	4.4	5.3
EVRA/T 15	2.7	2.4	3.2	4.1	5.2	6.4	7.9	9.5
EVRA/T 20	4.5	4.0	5.3	6.8	8.6	10.7	13.2	15.9
EVRA 25	10.0	8.8	11.7	15.0	19.1	23.7	29.3	35.3
EVRA 32	16.0	14.1	18.7	24.1	30.5	38.0	46.8	56.5
EVRA 40	25	22.0	29.2	37.6	47.7	59.4	73.1	88.2

Correction factor for ΔP ($f_{\Delta P}$)

ΔP (bar)	Correction factor
0.2	**1.00**
0.25	0.89
0.3	0.82
0.4	0.71
0.5	0.63
0.6	0.58

Correction factor for superheat (T_s)

T_s	Correction factor
6°C	1.00
8°C	1.00
10°C	1.00
12°C	1.00

Correction factor for liquid temperature (T_{liq})

Liquid temperature	Correction factor
–20°C	0.66
–10°C	0.70
0°C	0.76
10°C	0.82
20°C	0.90
30°C	**1.00**
40°C	1.13
50°C	1.29

US units

Capacity table for nominal conditions, Q_N [Tons of Refrigeration],
T_{liq} = 90°F,
ΔP = 3 psi

R 134a

Type	C_v	Evaporating temperature T_e						
	USgal/min	–40°F	–20°F	0°F	20°F	40°F	60°F	80°F
EVRA 3	0.26	0.1	0.1	0.1	0.1	0.2	0.2	0.3
EVRA/T 10	1.72	0.4	0.5	0.7	0.9	1.1	1.4	1.7
EVRA/T 15	3.1	0.7	0.9	1.2	1.6	2.0	2.5	3.1
EVRA/T 20	5.16	1.1	1.5	2.0	2.6	3.3	4.1	5.1
EVRA 25	11.44	2.5	3.4	4.5	5.8	7.3	9.2	11.3
EVRA 32	18.35	4.0	5.5	7.3	9.4	11.9	14.9	18.3
EVRA 40	28.7	6.3	8.6	11.3	14.7	18.6	23.2	28.5

Correction factor for ΔP ($f_{\Delta P}$)

ΔP (psi)	Correction factor
3	**1.00**
4	0.87
5	0.79
6	0.72
7	0.66
8	0.62

Correction factor for superheat (T_s)

T_s	Correction factor
10°F	1.00
14°F	1.00
18°F	1.00
20°F	1.00

Correction factor for liquid temperature (T_{liq})

Liquid temperature	Correction factor
–10°F	0.64
10°F	0.68
30°F	0.74
50°F	0.81
70°F	0.89
90°F	**1.00**
110°F	1.15
130°F	1.35

© Danfoss A/S (RC-MDP / MWA), 2014-04

Nominal capacities

Dry suction line

SI units

Capacity table for nominal conditions, Q_N [kW],
T_{liq} = 30°C,
ΔP = 0.2 bar

R 404A

Type	k_v	Evaporating temperature T_e						
	m^3/h	–40°C	–30°C	–20°C	–10°C	–0°C	10°C	20°C
EVRA 3	0.23	0.2	0.3	0.4	0.5	0.6	0.8	0.9
EVRA/T 10	1.5	1.6	2.1	2.6	3.3	4.1	4.9	5.9
EVRA/T 15	2.7	2.8	3.7	4.7	5.9	7.3	8.9	10.7
EVRA/T 20	4.5	4.7	6.2	7.9	9.8	12.2	14.8	17.8
EVRA 25	10	10.5	13.7	17.4	21.9	27.0	33.0	39.6
EVRA 32	16	16.8	21.9	27.9	35.0	43.2	52.7	63.3
EVRA 40	25	26.2	34.2	43.6	54.6	67.5	82.4	98.9

Correction factor for ΔP ($f_{\Delta P}$)

ΔP (bar)	Correction factor
0.2	**1.00**
0.25	0.89
0.3	0.82
0.4	0.71
0.5	0.63
0.6	0.58

Correction factor for superheat (T_s)

T_s	Correction factor
6°C	1.00
8°C	1.00
10°C	1.00
12°C	1.00

Correction factor for liquid temperature (T_{liq})

Liquid temperature	Correction factor
–20°C	0.55
–10°C	0.60
0°C	0.66
10°C	0.74
20°C	0.85
30°C	**1.00**
40°C	1.23
50°C	1.68

US units

Capacity table for nominal conditions, Q_N [Tons of Refrigeration],
T_{liq} = 90°F,
ΔP = 3 psi

R 404A

Type	C_v	Evaporating temperature T_e						
	USgal/min	–40°F	–20°F	0°F	20°F	40°F	60°F	80°F
EVRA 3	0.263	0.1	0.1	0.1	0.2	0.2	0.2	0.3
EVRA/T 10	1.719	0.4	0.6	0.8	1.0	1.2	1.5	1.9
EVRA/T 15	3.1	0.8	1.1	1.4	1.8	2.2	2.8	3.4
EVRA/T 20	5.16	1.3	1.8	2.3	2.9	3.7	4.6	5.6
EVRA 25	11.44	2.9	3.9	5.1	6.5	8.2	10.2	12.4
EVRA 32	18.6	4.7	6.4	8.3	10.6	13.4	16.6	20.2
EVRA 40	29	7.4	9.9	12.9	16.6	20.9	25.8	31.5

Correction factor for ΔP ($f_{\Delta P}$)

ΔP (psi)	Correction factor
3	**1.00**
4	0.87
5	0.79
6	0.72
7	0.66
8	0.62

Correction factor for superheat (T_s)

T_s	Correction factor
10°F	1.00
14°F	1.00
18°F	1.00
20°F	1.00

Correction factor for liquid temperature (T_{liq})

Liquid temperature	Correction factor
–10°F	0.52
10°F	0.57
30°F	0.63
50°F	0.72
70°F	0.83
90°F	**1.00**
110°F	1.29
130°F	1.92


© Danfoss A/S (RC-MDP / MWA), 2014-04

Nominal capacities

Discharge line


Pump

Location of valve in system (marked with grey)

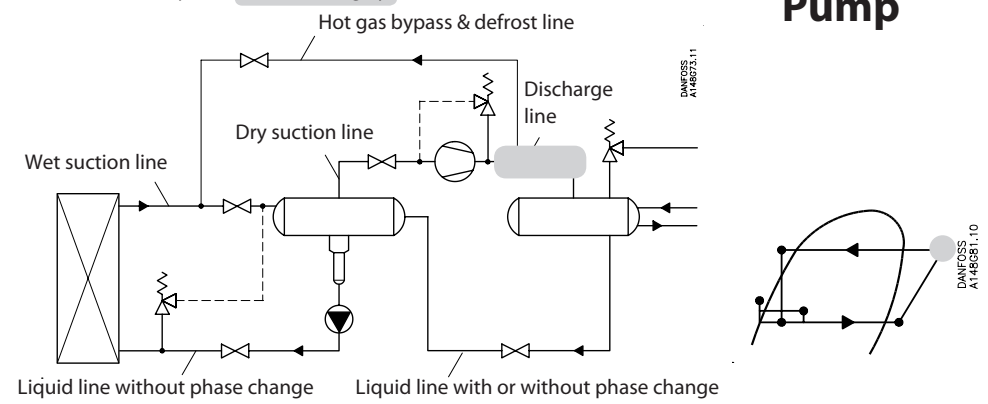


Gravity

Location of valve in system (marked with grey)

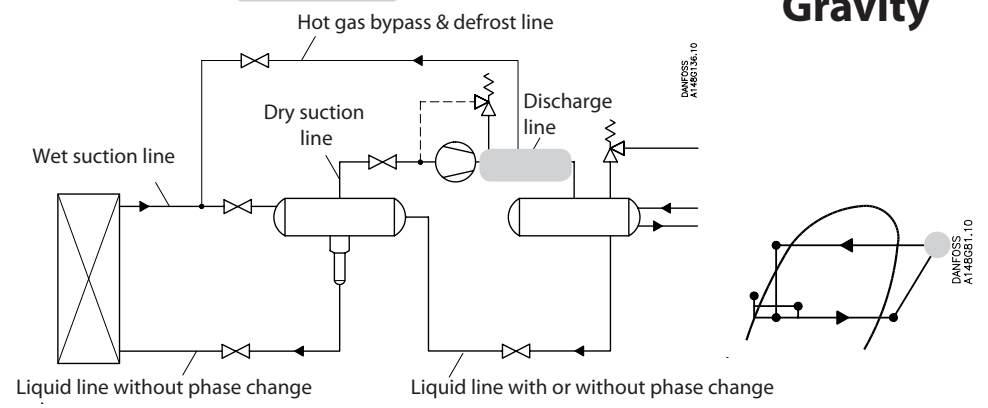

DX

Location of valve in system (marked with grey)

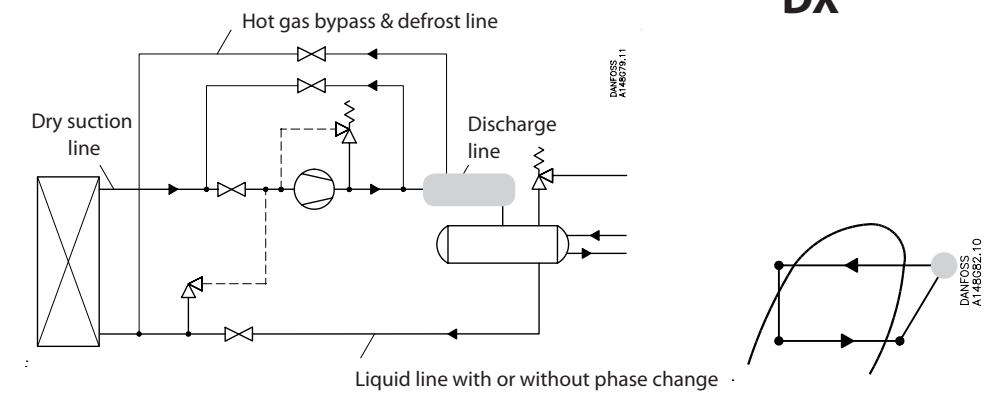

© Danfoss A/S (RC-MDP / MWA), 2014-04

Nominal capacities

Discharge line

SI units

Calculation example (R 22 capacities):

Running conditions in a plant are as follows:

T_e = –20 °C
Q_o = 90 kW
T_{liq} = 10 °C
Max. ΔP = 0.4 bar
T_{disch} = 60°C

The capacity table is based on nominel conditions (ΔP = 0.2 bar, T_{liq} = 30°C, P_{disch} = 12 bar, T_{disch} = 80°C).

The actual capacity must therefore be corrected to a nominal condition by multiplication with correction factors.

Correction factor for ΔP 0.4 bar $f_{\Delta P}$ = 0.72

Correction factor for liquid temperature f_{Tliq} = 0.86

Correction factor for T_{disch} 60°C, f_{disch} = 0.97

$Q_n = Q_o \times f_{\Delta P} \times f_{Tliq} \times f_{Tdisch}$
$= 90 \times 0.72 \times 0.92 \times 0.97 = 54$ kW.

From the capacity table an EVRA 32 with Q_n = 60.5 kW is the correct selection for the application.

US units

Calculation example (R 22 capacities):

Running conditions in a plant are as follows:

T_e = 0°F
Q_o = 18 TR
T_{liq} = 50 °F
Max. ΔP = 7 psi
T_{disch} = 120°F

The capacity table is based on nominel conditions (ΔP = 3 psi, T_{liq} = 90 °F, P_{disch} = 185 psi, T_{disch} = 180°F).

The actual capacity must therefore be corrected to a nominal condition by multiplication with correction factors.

Correction factor for ΔP 7 psi, $f_{\Delta P}$ = 0.67

Correction factor for liquid temperature = 50°F, f_{Tliq} = 0.87

Correction factor for T_{disch} 120°F, f_{disch} = 0.95

$Q_n = Q_o \times f_{\Delta P} \times f_{Tliq} \times f_{Tdisch}$
$= 18 \times 0.67 \times 0.92 \times 0.87 = 9.7$ TR

From the capacity table an EVRA 25 with Q_n = 10.9 TR is the correct selection for the application.

© Danfoss A/S (RC-MDP / MWA), 2014-04

Nominal capacities

Discharge line

SI units

Capacity table for nominal conditions,
Q_N *[kW],*
T_{liq} = 30°C,
$P_{disch.}$ = 12 bar,
ΔP = 0.2 bar,
$T_{disch.}$ = 80°C

R 717

Type	k_v	Evaporating temperature T_e						
	m^3/h	–40°C	–30°C	–20°C	–10°C	–0°C	10°C	20°C
EVRA 3	0.23	2.5	2.6	2.6	2.6	2.6	2.7	2.7
EVRA/T 10	1.5	16.4	16.7	16.9	17.1	17.2	17.4	17.5
EVRA/T 15	2.7	30	30	30	31	31	31	32
EVRA/T 20	4.5	49	50	51	51	52	52	53
EVRA 25	10	110	111	113	114	115	116	117
EVRA 32	16	175	178	180	182	184	186	187
EVRA 40	25	274	278	281	285	287	290	292

Correction factor for ΔP ($f_{\Delta P}$)

ΔP (bar)	Correction factor
0.2	**1.00**
0.4	0.72
0.6	0.59
0.8	0.52
1	0.46
1.5	0.39
2	0.34
4	0.27

Correction factor for discharge temperature (T_{disch})

Discharge temperature	Correction factor
50°C	0.96
60°C	0.97
80°C	**1.00**
90°C	1.01
100°C	1.03
110°C	1.04
120°C	1.06

Correction factor for liquid temperature (T_{liq})

Liquid temperature	Correction factor
–20°C	0.82
–10°C	0.86
0°C	0.88
10°C	0.92
20°C	0.96
30°C	**1.00**
40°C	1.04
50°C	1.09

US units

Capacity table for nominal conditions, Q_N *[Tons of Refrigeration],*
T_{liq} = 90°F,
ΔP = 3 psi,
$P_{disch.}$ = 185 psi,
$T_{disch.}$ = 180°F

R 717

Type	C_v	Evaporating temperature T_e						
	USgal/min	–40°F	–20°F	0°F	20°F	40°F	60°F	80°F
EVRA 3	0.3	0.7	0.7	0.8	0.8	0.8	0.8	0.8
EVRA/T 10	1.7	4.8	4.9	4.9	4.9	5.0	5.0	5.0
EVRA/T 15	3.1	8.7	8.8	8.9	8.9	9.0	9.0	9.1
EVRA/T 20	5.2	14	15	15	15	15	15	15
EVRA 25	11.6	32	33	33	33	33	33	34
EVRA 32	18.6	51	52	52	53	53	54	54
EVRA 40	29	79	80	81	83	84	84	84

Correction factor for ΔP ($f_{\Delta P}$)

ΔP (psi)	Correction factor
3	**1.00**
5	0.79
7	0.67
10	0.56
15	0.47
20	0.41
30	0.35
60	0.28

Correction factor for discharge temperature (T_{disch})

Discharge temperature	Correction factor
120°F	0.95
140°F	0.97
180°F	**1.00**
200°F	1.02
210°F	1.02
230°F	1.04
250°F	1.05

Correction factor for liquid temperature (T_{liq})

Liquid temperature	Correction factor
–10°F	0.82
10°F	0.85
30°F	0.88
50°F	0.92
70°F	0.96
90°F	**1.00**
110°F	1.04
130°F	1.09

© Danfoss A/S (RC-MDP / MWA), 2014-04

Nominal capacities

Discharge line

SI units

Capacity table for nominal conditions, Q_N [kW],
T_{liq} = 30°C,
$P_{disch.}$ = 12 bar,
ΔP = 0.2 bar,
$T_{disch.}$ = 80°C

R 22

Type	k_v	Evaporating temperature T_e						
	m^3/h	–40°C	–30°C	–20°C	–10°C	–0°C	10°C	20°C
EVRA 3	0.23	0.8	0.8	0.9	0.9	0.9	0.9	0.9
EVRA/T 10	1.5	5.4	5.5	5.7	5.8	5.9	6.1	6.2
EVRA/T 15	2.7	9.6	9.9	10.2	10.5	10.7	10.9	11.1
EVRA/T 20	4.5	16.1	16.6	17	17.4	17.8	18.2	18.5
EVRA 25	10	35.7	36.8	37.8	38.8	39.7	40.5	41.2
EVRA 32	16	57.2	58.9	60.5	62	63.5	64.8	65.9
EVRA 40	25	89.3	92	94.5	96.9	99.2	101.2	103

Correction factor for ΔP ($f_{\Delta P}$)

ΔP (bar)	Correction factor
0.2	**1.00**
0.4	0.72
0.6	0.59
0.8	0.52
1	0.46
1.5	0.39
2	0.34
4	0.27

Correction factor for discharge temperature (T_{disch})

Discharge temperature	Correction factor
50°C	0.96
60°C	0.97
80°C	**1.00**
90°C	1.01
100°C	1.03
110°C	1.04
120°C	1.06

Correction factor for liquid temperature (T_{liq})

Liquid temperature	Correction factor
–20°C	0.71
–10°C	0.75
0°C	0.80
10°C	0.86
20°C	0.92
30°C	**1.00**
40°C	1.09
50°C	1.22

US units

Capacity table for nominal conditions, Q_N [Tons of Refrigeration],
T_{liq} = 90°F,
ΔP = 3 psi,
$P_{disch.}$ = 185 psi,
$T_{disch.}$ = 180 °F

R 22

Type	C_v	Evaporating temperature T_e						
	USgal/min	–40°F	–20°F	0°F	20°F	40°F	60°F	80°F
EVRA 3	0.3	0.2	0.2	0.3	0.3	0.3	0.3	0.3
EVRA/T 10	1.7	1.5	1.6	1.6	1.7	1.7	1.8	1.8
EVRA/T 15	3.1	2.8	2.9	2.9	3.0	3.1	3.2	3.2
EVRA/T 20	5.2	4.6	4.8	4.9	5.1	5.2	5.3	5.4
EVRA 25	11.6	10.3	10.6	10.9	11.2	11.5	11.8	12
EVRA 32	18.6	16.4	17	17.5	18	18.4	18.8	19.2
EVRA 40	29	25.6	26.5	27.3	28.1	28.8	29.4	30

Correction factor for ΔP ($f_{\Delta P}$)

ΔP (psi)	Correction factor
3	**1.00**
5	0.79
7	0.67
10	0.56
15	0.47
20	0.41
30	0.35
60	0.28

Correction factor for discharge temperature (T_{disch})

Discharge temperature	Correction factor
120°F	0.95
140°F	0.97
180°F	**1.00**
200°F	1.02
210°F	1.02
230°F	1.04
250°F	1.05

Correction factor for liquid temperature (T_{liq})

Liquid temperature	Correction factor
–10°F	0.73
10°F	0.77
30°F	0.82
50°F	0.87
70°F	0.93
90°F	**1.00**
110°F	1.09
130°F	1.20

© Danfoss A/S (RC-MDP / MWA), 2014-04

Nominal capacities

Discharge line

SI units

Capacity table for nominal conditions, Q_N [kW],
T_{liq} = 30°C,
P_{disch} = 8 bar,
ΔP = 0.2 bar
T_{disch} = 80 °C

R 134a

Type	k_v	Evaporating temperature T_e						
	m^3/h	–40°C	–30°C	–20°C	–10°C	–0°C	10°C	20°C
EVRA 3	0.23	0.6	0.7	0.7	0.7	0.7	0.8	0.8
EVRA/T 10	1.5	4.1	4.2	4.4	4.6	4.8	5.0	5.1
EVRA/T 15	2.7	7.3	7.6	8.0	8.3	8.6	9.0	9.3
EVRA/T 20	4.5	12.2	12.7	13.3	13.9	14.4	14.9	15.4
EVRA 25	10	27	28.3	29.6	30.8	32	33.2	34.3
EVRA 32	16	43.2	45.3	47.3	49.3	51.2	53.1	54.9
EVRA 40	25	67.6	70.8	73.9	77.0	80.1	83	85.8

Correction factor for ΔP ($f_{\Delta P}$)

ΔP (bar)	Correction factor
0.2	**1.00**
0.4	0.72
0.6	0.59
0.8	0.52
1	0.46
1.5	0.39
2	0.34
4	0.27

Correction factor for discharge temperature (T_{disch})

Discharge temperature	Correction factor
50°C	0.96
60°C	0.97
80°C	**1.00**
90°C	1.01
100°C	1.03
110°C	1.04
120°C	1.06

Correction factor for liquid temperature (T_{liq})

Liquid temperature	Correction factor
–20°C	0.66
–10°C	0.70
0°C	0.76
10°C	0.82
20°C	0.90
30°C	**1.00**
40°C	1.13
50°C	1.29

US units

Capacity table for nominal conditions, Q_N [Tons of Refrigeration],
T_{liq} = 90°F,
ΔP = 3 psi
P_{disch} = 120 psi,
T_{disch} = 180 °F

R 134a

Type	C_v	Evaporating temperature T_e						
	USgal/min	–40°F	–20°F	0°F	20°F	40°F	60°F	80°F
EVRA 3	0.3	0.2	0.2	0.2	0.2	0.2	0.2	0.2
EVRA/T 10	1.7	1.2	1.2	1.3	1.4	1.4	1.5	1.5
EVRA/T 15	3.1	2.1	2.2	2.3	2.5	2.6	2.7	2.8
EVRA/T 20	5.2	3.5	3.7	3.9	4.1	4.3	4.5	4.6
EVRA 25	11.6	7.9	8.3	8.7	9.1	9.5	9.9	10.3
EVRA 32	18.6	12.6	13.3	13.9	14.6	15.2	15.9	16.4
EVRA 40	29	19.7	20.7	21.8	22.8	23.7	24.8	25.7

Correction factor for ΔP ($f_{\Delta P}$)

ΔP (psi)	Correction factor
3	**1.00**
5	0.79
7	0.67
10	0.56
15	0.47
20	0.41
30	0.35
60	0.28

Correction factor for discharge temperature (T_{disch})

Discharge temperature	Correction factor
120°F	0.95
140°F	0.97
180°F	**1.00**
200°F	1.02
210°F	1.02
230°F	1.04
250°F	1.05

Correction factor for liquid temperature (T_{liq})

Liquid temperature	Correction factor
–10°F	0.64
10°F	0.68
30°F	0.74
50°F	0.81
70°F	0.89
90°F	**1.00**
110°F	1.15
130°F	1.35

© Danfoss A/S (RC-MDP / MWA), 2014-04

Nominal capacities

Discharge line

SI units

Capacity table for nominal conditions, Q_N [kW],
T_{liq} = 30°C,
P_{disch} = 12 bar
ΔP = 0.2 bar,
T_{disch} = 80 °C

R 404A

Type	k_v	Evaporating temperature T_e						
	m^3/h	–40°C	–30°C	–20°C	–10°C	–0°C	10°C	20°C
EVRA 3	0.23	0.6	0.7	0.7	0.7	0.8	0.8	0.8
EVRA/T 10	1.5	4.1	4.3	4.6	4.8	5.1	5.3	5.5
EVRA/T 15	2.7	7.3	7.8	8.3	8.7	9.1	9.5	9.9
EVRA/T 20	4.5	12.2	13	13.8	14.5	15.2	15.9	16.5
EVRA 25	10	27.1	28.9	30.6	32.3	33.8	35.3	36.6
EVRA32	16	43.3	46.2	48.9	51.6	54.1	56.5	58.5
EVRA 40	25	67.7	72.1	76.5	80.6	84.6	88.2	91.5

Correction factor for ΔP ($f_{\Delta P}$)

ΔP (bar)	Correction factor
0.2	**1.00**
0.4	0.72
0.6	0.59
0.8	0.52
1	0.46
1.5	0.39
2	0.34
4	0.27

Correction factor for discharge temperature (T_{disch})

Discharge temperature	Correction factor
50°C	0.96
60°C	0.97
80°C	**1.00**
90°C	1.01
100°C	1.03
110°C	1.04
120°C	1.06

Correction factor for liquid temperature (T_{liq})

Liquid temperature	Correction factor
–20°C	0.55
–10°C	0.60
0°C	0.66
10°C	0.74
20°C	0.85
30°C	**1.00**
40	1.23
50	1.68

US units

Capacity table for nominal conditions, Q_N [Tons of Refrigeration],
T_{liq} = 90°F,
ΔP = 3 psi,
P_{disch} = 185 psi,
T_{disch} = 180°F

R 404A

Type	C_v	Evaporating temperature T_e						
	USgal/min	–40°F	–20°F	0°F	20°F	40°F	60°F	80°F
EVRA 3	0.3	0.2	0.2	0.2	0.2	0.2	0.2	0.2
EVRA/T 10	1.7	1.1	1.2	1.3	1.4	1.4	1.5	1.6
EVRA/T 15	3.1	2	2.2	2.3	2.5	2.6	2.7	2.8
EVRA/T 20	5.2	3.4	3.6	3.9	4.1	4.3	4.6	4.7
EVRA 25	11.6	7.5	8.1	8.6	9.2	9.7	10.1	10.5
EVRA 32	18.6	12.1	13	13.8	14.7	15.4	16.2	16.8
EVRA 40	29	18.8	20.2	21.6	22.9	24.1	25.3	26.3

Correction factor for ΔP ($f_{\Delta P}$)

ΔP (psi)	Correction factor
3	**1.00**
5	0.79
7	0.67
10	0.56
15	0.47
20	0.41
30	0.35
60	0.28

Correction factor for discharge temperature (T_{disch})

Discharge temperature	Correction factor
120°F	0.95
140°F	0.97
180°F	**1.00**
200°F	1.02
210°F	1.02
230°F	1.04
250°F	1.05


Correction factor for liquid temperature (T_{liq})

Liquid temperature	Correction factor
–10°F	0.52
10°F	0.57
30°F	0.63
50°F	0.72
70°F	0.83
90°F	**1.00**
110°F	1.29
130°F	1.92

© Danfoss A/S (RC-MDP / MWA), 2014-04

Nominal capacities

Pumped liquid line

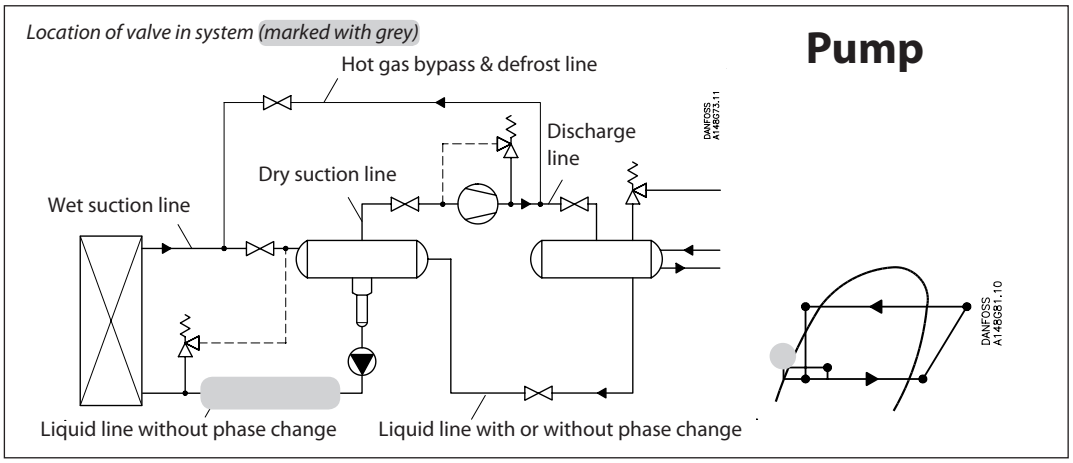

SI units

Calculation example (R 22 capacities):

Running conditions in a plant are as follows:

T_e = –20°C
Q_0 = 300 kW
circulation ratio = 3
Max. ΔP = 0.3 bar

The capacity table is based on nominal conditions (pressure drop ΔP = 0.3 bar, circulation ratio = 4).

The actual capacity must therefore be corrected to a nominal condition by multiplication with correction factors.

Correction factor for ΔP 0.3 bar $f_{\Delta P}$ = 0.82

Correction factor for circulation ratio f_{circ} = 0.75

$Q_n = Q_0 \times f_{\Delta p} \times f_{circ} = 300 \times 0.82 \times 0.75$
= 185 kW.

From the capacity table an EVRA 40 with Q_n = 199 kW is the correct selection for the application.

US units

Calculation example (R 22 capacities):

Running conditions in a plant are as follows:

T_e = –20°F
Q_0 = 100 TR
Circulation ratio = 3
Max. ΔP = 5 psi

The capacity table is based on nominal conditions (pressure drop ΔP = 3 psi, circulation ratio = 4).

The actual capacity must therefore be corrected to a nominal condition by multiplication with correction factors.

Correction factor for ΔP 5 psi $f_{\Delta p}$ = 0.79
Correction factor for circulation ratio f_{circ} = 0.75

$Q_n = Q_0 \times f_{\Delta P} \times f_{circ} = 100 \times 0.79 \times 0.75 = 59$ TR

From the capacity table an EVRA 40 with Q_n = 60 TR is the correct selection for the application.

© Danfoss A/S (RC-MDP / MWA), 2014-04

Nominal capacities

Pumped liquid line

SI units

Capacity table for nominal conditions, Q_N [kW],
circulation ratio = 4,
ΔP = 0.2 bar

R 717

Type	k_v	Evaporating temperature T_e						
	m^3/h	–40°C	–30°C	–20°C	–10°C	–0°C	10°C	20°C
EVRA 3	0.23	8.1	7.9	7.7	7.4	7.1	6.8	6.6
EVRA/T 10	1.5	53	52	50	48	46	45	43
EVRA/T 15	2.7	96	93	90	87	84	80	77
EVRA/T 20	4.5	159	155	150	145	139	134	128
EVRA 25	10	354	344	333	321	310	298	285
EVRA 32	16	567	550	532	514	496	476	456
EVRA 40	25	886	859	832	804	775	744	712

Correction factor for ΔP ($f_{\Delta P}$)

ΔP (bar)	Correction factor
0.2	**1.00**
0.25	0.89
0.3	0.82
0.4	0.71
0.5	0.63
0.6	0.58

Correction factor for circulation ratio (f_{circ})

Circulation ratio	Correction factor
2	0.5
3	0.75
4	**1**
6	1.5
8	2
10	2.5

US units

Capacity table for nominal conditions, Q_N [Tons of Refrigeration],
circulation ratio = 4,
ΔP = 3 psi

R 717

Type	C_v	Evaporating temperature T_e						
	USgal/min	–40°F	–20°F	0°F	20°F	40°F	60°F	80°F
EVRA 3	0.3	2.4	2.3	2.2	2.1	2.0	1.9	1.8
EVRA/T 10	1.7	15.3	14.9	14.3	13.8	13.2	12.6	12.0
EVRA/T 15	3.1	27.6	26.7	25.8	24.8	23.8	22.6	21.5
EVRA/T 20	5.2	46	45	43	41	40	38	36
EVRA 25	11.6	102	99	96	92	88	84	80
EVRA 32	18.6	164	158	153	147	141	134	127
EVRA 40	29	256	248	239	230	220	209	199

Correction factor for ΔP ($f_{\Delta P}$)

ΔP (bar)	Correction factor
3	**1.00**
4	0.87
5	0.79
6	0.72
7	0.66
8	0.62

Correction factor for circulation ratio (f_{circ})

Circulation ratio	Correction factor
2	0.5
3	0.75
4	**1**
6	1.5
8	2
10	2.5

© Danfoss A/S (RC-MDP / MWA), 2014-04

Nominal capacities

Pumped liquid line

SI units

Capacity table for nominal conditions, Q_N [kW],
circulation ratio = 4,
ΔP = 0.2 bar

R 22

Type	k_v	Evaporating temperature T_e						
	m^3/h	–40°C	–30°C	–20°C	–10°C	–0°C	10°C	20°C
EVRA 3	0.23	2	2	2	2	2	2	1
EVRA/T 10	1.5	13	12	12	11	11	10	10
EVRA/T 15	2.7	23	22	21	21	20	18	17
EVRA/T 20	4.5	39	37	36	34	33	31	29
EVRA 25	10	86	83	79	76	72	68	64
EVRA 32	16	138	133	127	122	116	109	103
EVRA 40	25	215	207	199	190	181	171	161

Correction factor for ΔP ($f_{\Delta P}$)

ΔP (bar)	Correction factor
0.2	**1.00**
0.25	0.89
0.3	0.82
0.4	0.71
0.5	0.63
0.6	0.58

Correction factor for circulation ratio (f_{circ})

Circulation ratio	Correction factor
2	0.5
3	0.75
4	**1**
6	1.5
8	2
10	2.5

US units

Capacity table for nominal conditions, Q_N [Tons of Refrigeration],
circulation ratio = 4,
ΔP = 3 psi

R 22

Type	C_v	Evaporating temperature T_e						
	USgal/min	–40°F	–20°F	0°F	20°F	40°F	60°F	80°F
EVRA 3	0.3	0.6	0.5	0.5	0.5	0.5	0.4	0.5
EVRA/T 10	1.7	4	4	3	3	3	3	3
EVRA/T 15	3.1	7	6	6	6	6	5	5
EVRA/T 20	5.2	11	11	10	10	9	9	8
EVRA 25	11.6	25	24	23	22	20	19	18
EVRA 32	18.6	40	38	36	35	33	30	28
EVRA 40	29	62	60	57	54	51	48	44

Correction factor for ΔP ($f_{\Delta P}$)

ΔP (bar)	Correction factor
3	**1.00**
4	0.87
5	0.79
6	0.72
7	0.66
8	0.62

Correction factor for circulation ratio (f_{circ})

Circulation ratio	Correction factor
2	0.5
3	0.75
4	**1**
6	1.5
8	2
10	2.5

© Danfoss A/S (RC-MDP / MWA), 2014-04

Nominal capacities

Pumped liquid line

SI units

Capacity table for nominal conditions, Q_N [kW],
circulation ratio = 4,
ΔP = 0.2 bar

R 134a

Type	k_v	Evaporating temperature T_e						
	m^3/h	–40°C	–30°C	–20°C	–10°C	–0°C	10°C	20°C
EVRA 3	0.23	1.9	1.8	1.8	1.7	1.6	1.5	1.4
EVRA/T 10	1.5	12	12	11	11	10	10	9.3
EVRA/T 15	2.7	22	21	21	20	19	18	17
EVRA/T 20	4.5	37	36	34	33	31	30	28
EVRA 25	10	82	79	76	73	70	66	62
EVRA 32	16	132	127	122	117	112	106	100
EVRA 40	25	206	199	191	183	174	165	156

Correction factor for ΔP ($f_{\Delta P}$)

ΔP (bar)	Correction factor
0.2	**1.00**
0.25	0.89
0.3	0.82
0.4	0.71
0.5	0.63
0.6	0.58

Correction factor for circulation ratio (f_{circ})

Circulation ratio	Correction factor
2	0.5
3	0.75
4	**1**
6	1.5
8	2
10	2.5

US units

Capacity table for nominal conditions, Q_N [Tons of Refrigeration],
circulation ratio = 4,
ΔP = 3 psi

R 134a

Type	C_v	Evaporating temperature T_e						
	USgal/min	–40°F	–20°F	0°F	20°F	40°F	60°F	80°F
EVRA 3	0.3	0.5	0.5	0.5	0.5	0.5	0.4	0.4
EVRA/T 10	1.7	3.6	3.4	3.3	3.1	3.0	2.8	2.6
EVRA/T 15	3.1	6.4	6.2	5.9	5.6	5.3	5.0	4.6
EVRA/T 20	5.2	10.7	10.3	9.8	9.4	8.9	8.3	7.7
EVRA 25	11.6	24	23	22	21	20	18	17
EVRA 32	18.6	38	37	35	33	32	30	27
EVRA 40	29	60	57	55	52	49	46	43

Correction factor for ΔP ($f_{\Delta P}$)

ΔP (bar)	Correction factor
3	**1.00**
4	0.87
5	0.79
6	0.72
7	0.66
8	0.62

Correction factor for circulation ratio (f_{circ})

Circulation ratio	Correction factor
2	0.5
3	0.75
4	**1**
6	1.5
8	2
10	2.5

© Danfoss A/S (RC-MDP / MWA), 2014-04

Nominal capacities

Pumped liquid line

SI units

Capacity table for nominal conditions, Q_N [kW],
circulation ratio = 4,
ΔP = 0.2 bar

R 404A

Type	k_v	Evaporating temperature T_e						
	m^3/h	–40°C	–30°C	–20°C	–10°C	–0°C	10°C	20°C
EVRA 3	0.23	2	2	1	1	1	1	1
EVRA/T 10	1.5	10	10	9	9	8	8	7
EVRA/T 15	2.7	19	18	17	16	15	14	13
EVRA/T 20	4.5	31	30	28	27	25	23	21
EVRA 25	10	69	66	63	59	55	51	47
EVRA 32	16	111	105	100	95	89	82	75
EVRA 40	25	174	164	157	148	138	128	117

Correction factor for ΔP ($f_{\Delta P}$)

ΔP (bar)	Correction factor
0.2	**1.00**
0.25	0.89
0.3	0.82
0.4	0.71
0.5	0.63
0.6	0.58

Correction factor for circulation ratio (f_{circ})

Circulation ratio	Correction factor
2	0.5
3	0.75
4	**1**
6	1.5
8	2
10	2.5

US units

Capacity table for nominal conditions, Q_N [Tons of Refrigeration],
circulation ratio = 4,
ΔP = 3 psi

R 404A

Type	C_v	Evaporating temperature T_e						
	USgal/min	–40°F	–20°F	0°F	20°F	40°F	60°F	80°F
EVRA 3	0.3	0.5	0.4	0.4	0.4	0.4	0.3	0.3
EVRA/T 10	1.7	3	3	3	3	2	2	2
EVRA/T 15	3.1	5	5	5	5	4	4	3
EVRA/T 20	5.2	9	9	8	8	7	6	6
EVRA 25	11.6	20	19	18	17	16	14	12
EVRA 32	18.6	32	30	29	27	25	22	20
EVRA 40	29	50	47	45	42	39	35	31

Correction factor for ΔP ($f_{\Delta P}$)

ΔP (bar)	Correction factor
3	**1.00**
4	0.87
5	0.79
6	0.72
7	0.66
8	0.62

Correction factor for circulation ratio (f_{circ})


Circulation ratio	Correction factor
2	0.5
3	0.75
4	**1**
6	1.5
8	2
10	2.5

© Danfoss A/S (RC-MDP / MWA), 2014-04


Nominal capacities

Wet suction line

Pump

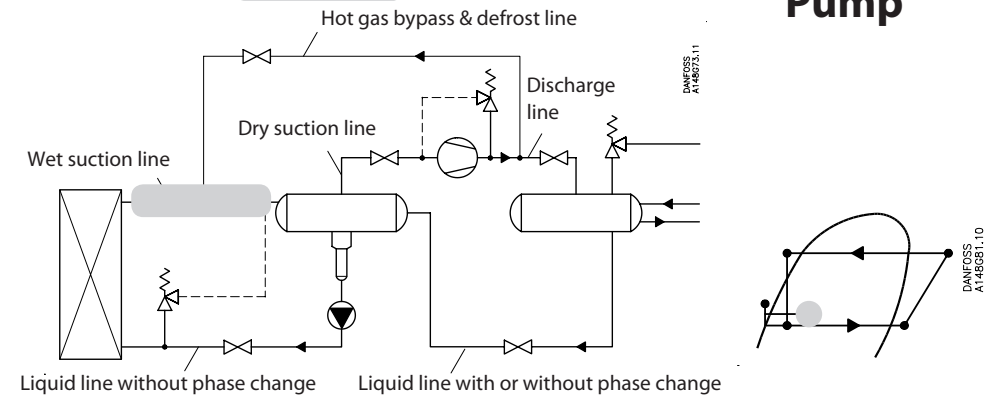

Gravity

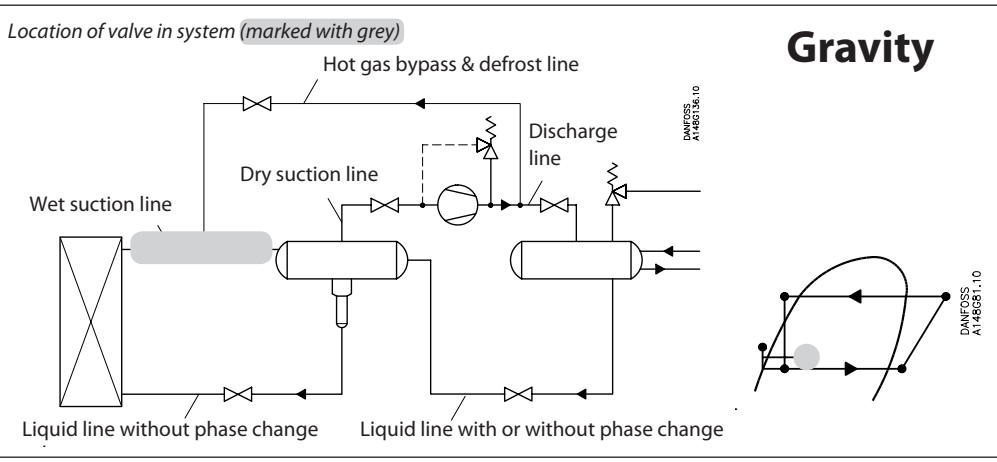

Nominal capacities

Wet suction line

SI units

Calculation example (R 22 capacities):

Running conditions in a plant are as follows:

T_e = –20°C
Q_0 = 30 kW
Circulation ratio = 3
Max. ΔP = 0.3 bar

The capacity table is based on nominal conditions (pressure drop ΔP = 0.2 bar, circulation ratio = 4).

The actual capacity must therefore be corrected to a nominal condition by multiplication with correction factors.

Correction factor for ΔP 0.3 bar $f_{\Delta P}$ = 0.82

Correction factor for circulation ratio f_{circ} = 0.75

$Q_n = Q_0 \times f_{\Delta P} \times f_{circ}$ = 30 x 0.82 × 0.75 = 18.5 kW.

From the capacity table an EVRA 32 with Q_n = 25 kW is the correct selection for the application.

US units

Calculation example (R 22 capacities):

Running conditions in a plant are as follows:

T_e = – 20°F
Q_0 = 10 TR
Circulation ratio = 3
Max. ΔP = 5 psi

The capacity table is based on nominal conditions (pressure drop ΔP = 3 psi, circulation ratio = 4).

The actual capacity must therefore be corrected to a nominal condition by multiplication with correction factors.

Correction factor for ΔP 5 psi $f_{\Delta p}$ = 0.79

Correction factor for circulation ratio f_{circ} = 0.75

$Q_n = Q_0 \times f_{\Delta P} \times f_{circ}$ = 10 × 0.79 × 0.75 = 3 TR

From the capacity table a EVRA 25 with Q_n = 3.8 TR is the correct selection for the application.

© Danfoss A/S (RC-MDP / MWA), 2014-04

Nominal capacities

Wet suction line

SI units

Capacity table for nominal conditions, Q_N [kW],
circulation ratio = 4,
ΔP = 0.2 bar

R 717

Type	k_v	Evaporating temperature T_e						
	m^3/h	–40°C	–30°C	–20°C	–10°C	–0°C	10°C	20°C
EVRA 3	0.23	0.5	0.7	0.8	1.0	1.1	1.3	1.5
EVRA/T 10	1.5	3.6	4.4	5.4	6.4	7.5	8.6	9.8
EVRA/T 15	2.7	6.4	7.9	9.6	11.5	13.5	15.5	17.6
EVRA/T 20	4.5	10.7	13.2	16.1	19.2	22.4	26	29
EVRA 25	10	23.7	29.4	36	43	50	57	65
EVRA 32	16	38	47	57	68	80	92	104
EVRA 40	25	59	74	89	106	125	144	163

Correction factor for ΔP ($f_{\Delta P}$)

ΔP (bar)	Correction factor
0.2	**1.00**
0.25	0.89
0.3	0.82
0.4	0.71
0.5	0.63
0.6	0.58

Correction factor for circulation ratio (f_{circ})

Circulation ratio	Correction factor
2	0.77
3	0.90
4	**1**
6	1.13
8	1.20
10	1.25

US units

Capacity table for nominal conditions, Q_N [Tons of Refrigeration],
circulation ratio = 4,
ΔP = 3 psi

R 717

Type	C_v	Evaporating temperature T_e						
	USgal/min	–40°F	–20°F	0°F	20°F	40°F	60°F	80°F
EVRA 3	0.3	0.2	0.2	0.2	0.3	0.4	0.4	0.5
EVRA/T 10	1.7	1.0	1.3	1.6	2.0	2.3	2.7	3.0
EVRA/T 15	3.1	1.8	2.3	2.9	3.5	4.2	4.8	5.5
EVRA/T 20	5.2	3.1	3.9	4.9	5.9	6.9	8.0	9.1
EVRA 25	11.6	6.8	8.7	10.8	13	15.4	17.8	20.2
EVRA 32	18.6	10.9	13.9	17.3	20.8	24.6	28.4	32.4
EVRA 40	29	17.1	21.7	27.0	32.5	38	44	51

Correction factor for ΔP ($f_{\Delta P}$)

ΔP (bar)	Correction factor
3	**1.00**
4	0.87
5	0.79
6	0.72
7	0.66
8	0.62

Correction factor for circulation ratio (f_{circ})

Circulation ratio	Correction factor
2	0.77
3	0.90
4	**1**
6	1.13
8	1.20
10	1.25

© Danfoss A/S (RC-MDP / MWA), 2014-04

Nominal capacities

Wet suction line

SI units

Capacity table for nominal conditions, Q_N [kW],
circulation ratio = 4,
ΔP = 0.2 bar

R 22

Type	k_v	Evaporating temperature T_e						
	m^3/h	–40°C	–30°C	–20°C	–10°C	–0°C	10°C	20°C
EVRA 3	0.23	0.3	0.3	0.3	0.4	0.4	0.5	0.6
EVRA/T 10	1.5	1.6	2.0	2.3	2.7	3.0	3.4	3.7
EVRA/T 15	2.7	2.9	3.5	4.1	4.8	5.4	6.1	6.7
EVRA/T 20	4.5	4.9	5.9	6.9	8	9	10	11
EVRA 25	10	10.9	13.1	15	18	20	22	25
EVRA 32	16	17	21	25	28	32	36	40
EVRA 40	25	27	33	38	44	50	56	62

Correction factor for ΔP ($f_{\Delta P}$)

ΔP (bar)	Correction factor
0.2	**1.00**
0.25	0.89
0.3	0.82
0.4	0.71
0.5	0.63
0.6	0.58

Correction factor for circulation ratio (f_{circ})

Circulation ratio	Correction factor
2	0.77
3	0.90
4	**1**
6	1.13
8	1.20
10	1.25

US units

Capacity table for nominal conditions, Q_N [Tons of Refrigeration],
circulation ratio = 4,
ΔP = 3 psi

R 22

Type	C_v	Evaporating temperature T_e						
	USgal/min	–40°F	–20°F	0°F	20°F	40°F	60°F	80°F
EVRA 3	0.3	0.1	0.1	0.1	0.1	0.1	0.2	0.2
EVRA/T 10	1.7	0.5	0.6	0.7	0.8	0.9	1.0	1.1
EVRA/T 15	3.1	0.9	1.0	1.2	1.4	1.6	1.9	2.0
EVRA/T 20	5.2	1.4	1.7	2.1	2.4	2.7	3.1	3.4
EVRA 25	11.6	3.2	3.8	4.6	5.3	6.1	7	8
EVRA 32	18.6	5.1	6.2	7.3	9	10	11	12
EVRA 40	29	8	10	11	13	15	17	19

Correction factor for ΔP ($f_{\Delta P}$)

ΔP (bar)	Correction factor
3	**1.00**
4	0.87
5	0.79
6	0.72
7	0.66
8	0.62

Correction factor for circulation ratio (f_{circ})

Circulation ratio	Correction factor
2	0.77
3	0.90
4	**1**
6	1.13
8	1.20
10	1.25

© Danfoss A/S (RC-MDP / MWA), 2014-04

Nominal capacities

Wet suction line

SI units

Capacity table for nominal conditions, Q_N [kW],
circulation ratio = 4,
ΔP = 0.2 bar

R 134a

Type	k_v	Evaporating temperature T_e						
	m^3/h	–40°C	–30°C	–20°C	–10°C	–0°C	10°C	20°C
EVRA 3	0.23	2	2	2	2	2	2	1
EVRA/T 10	1.5	13	12	12	11	11	10	10
EVRA/T 15	2.7	23	22	21	21	20	18	17
EVRA/T 20	4.5	39	37	36	34	33	31	29
EVRA 25	10	86	83	79	76	72	68	64
EVRA 32	16	138	133	127	122	116	109	103
EVRA 40	25	215	207	199	190	181	171	161

Correction factor for ΔP ($f_{\Delta P}$)

ΔP (bar)	Correction factor
0.2	**1.00**
0.25	0.89
0.3	0.82
0.4	0.71
0.5	0.63
0.6	0.58

Correction factor for circulation ratio (f_{circ})

Circulation ratio	Correction factor
2	0.77
3	0.90
4	**1**
6	1.13
8	1.20
10	1.25

US units

Capacity table for nominal conditions, Q_N [Tons of Refrigeration],
circulation ratio = 4,
ΔP = 3 psi

R 134a

Type	C_v	Evaporating temperature T_e						
	USgal/min	–40°F	–20°F	0°F	20°F	40°F	60°F	80°F
EVRA 3	0.3	0.2	0.2	0.2	0.3	0.4	0.4	0.5
EVRA/T 10	1.7	1	1.3	1.6	2	2.3	2.7	3
EVRA/T 15	3.1	1.8	2.3	2.9	3.5	4.2	4.8	5.5
EVRA/T 20	5.2	3.1	3.9	4.9	5.9	6.9	8	9.1
EVRA 25	11.6	6.8	8.7	10.8	13	15.4	17.8	20.2
EVRA 32	18.6	10.9	13.9	17.3	20.8	24.6	28.4	32.4
EVRA 40	29	17.1	21.7	27	32.5	38	44	51

Correction factor for ΔP ($f_{\Delta P}$)

ΔP (bar)	Correction factor
3	**1.00**
4	0.87
5	0.79
6	0.72
7	0.66
8	0.62

Correction factor for circulation ratio (f_{circ})

Circulation ratio	Correction factor
2	0.77
3	0.90
4	**1**
6	1.13
8	1.20
10	1.25

© Danfoss A/S (RC-MDP / MWA), 2014-04

Nominal capacities

Wet suction line

SI units

Capacity table for nominal conditions, Q_N [kW],
circulation ratio = 4,
ΔP = 0.2 bar

R 404A

Type	k_v	Evaporating temperature T_e						
	m^3/h	–40°C	–30°C	–20°C	–10°C	–0°C	10°C	20°C
EVRA 3	0.23	0.3	0.3	0.3	0.4	0.4	0.5	0.5
EVRA/T 10	1.5	1.7	2	2.3	2.6	2.9	3.2	3.5
EVRA/T 15	2.7	3.0	3.5	4.1	4.7	5.3	5.8	6.3
EVRA/T 20	4.5	5.0	5.9	6.8	7.8	8.8	9.7	10.5
EVRA 25	10	11.1	13.0	15.2	17.4	19.5	21.5	23.4
EVRA 32	16	17.8	20.8	24.3	27.8	31.2	34.5	37.4
EVRA 40	25	27.7	32.6	38	43.8	48.8	53.9	58.4

Correction factor for ΔP ($f_{\Delta P}$)

ΔP (bar)	Correction factor
0.2	**1.00**
0.25	0.89
0.3	0.82
0.4	0.71
0.5	0.63
0.6	0.58

Correction factor for circulation ratio (f_{circ})

Circulation ratio	Correction factor
2	0.77
3	0.90
4	**1**
6	1.13
8	1.20
10	1.25

US units

Capacity table for nominal conditions, Q_N [Tons of Refrigeration],
circulation ratio = 4,
ΔP = 3 psi

R 404A

Type	C_v	Evaporating temperature T_e						
	USgal/min	–40°F	–20°F	0°F	20°F	40°F	60°F	80°F
EVRA 3	0.3	0.1	0.1	0.1	0.1	0.1	0.2	0.2
EVRA/T 10	1.7	0.5	0.6	0.7	0.8	0.9	1	1.1
EVRA/T 15	3.1	0.9	1.0	1.2	1.4	1.6	1.8	1.9
EVRA/T 20	5.2	1.4	1.7	2	2.3	2.6	2.9	3.2
EVRA 25	11.6	3.2	3.8	4.5	5.2	5.9	6.6	7.1
EVRA 32	18.6	5.1	6.1	7.2	8.3	9.4	10.5	11.3
EVRA 40	29	8	9.6	11.3	13	14.7	16.4	17.6

Correction factor for ΔP ($f_{\Delta P}$)


ΔP (bar)	Correction factor
3	**1.00**
4	0.87
5	0.79
6	0.72
7	0.66
8	0.62

Correction factor for circulation ratio (f_{circ})

Circulation ratio	Correction factor
2	0.77
3	0.90
4	**1**
6	1.13
8	1.20
10	1.25

© Danfoss A/S (RC-MDP / MWA), 2014-04

Coils for EVR valves

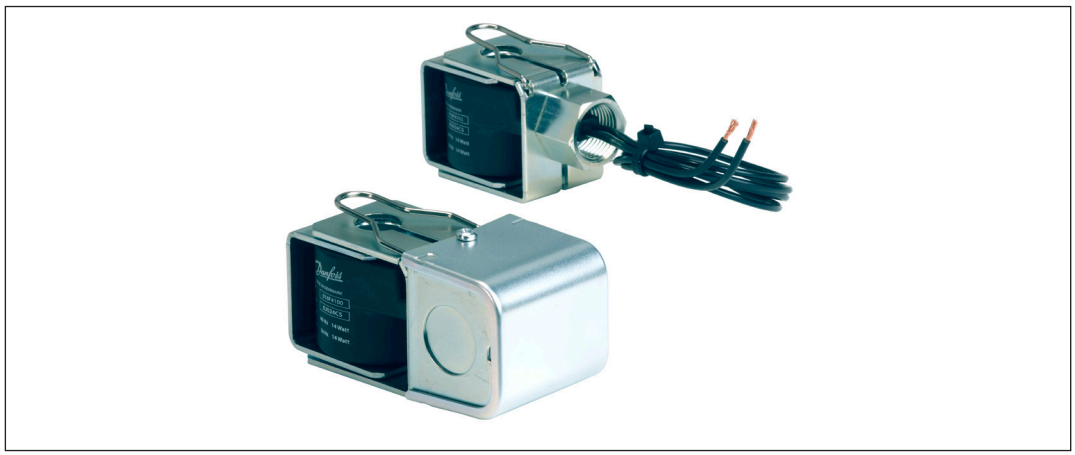

Approvals

Listed with EVR, MH7648
Low Voltage Directive (LVD) 2006/95/EC

Technical data

Permissible voltage variation	Alternating current (a.c.): -15 – 10%
Insulation of coil wire	Class H according to IEC 85
Enclosure, IEC 529	Junction box NEMA 1 IP12 – IP32 / Conduit boss ~ NEMA 4 IP54
Ambient temperature	-40 – 122 °F (-40 – 50 °C)

Ordering





Valve type	Coil type	Code no.	Wire length		Voltage	Frequency	Power consumption W
			in.	cm	V a.c.	Hz	
Junction box NEMA 2							
EVR/EVRH EVRA / EVRAT EVRS / EVRST EVM	BJ024CS	018F4100	7	18	24	50 / 60	14
	BJ120CS	018F4110	7	18	110 120	50 / 60 60	16 15
	BJ240CS	018F4120	7	18	208 – 240 230	60 50	14 17
Conduit boss NEMA 4							
EVR/EVRH EVRA / EVRAT EVRS / EVRST EVM	BX024CS	018F4102	18	46	24	50 / 60	14
	BX024CS	018F4103	71	180	24	50 / 60	14
	BX024CS	018F4104	98	250	24	50 / 60	14
	BX120CS	018F4112	18	46	110 120	50 / 60 60	16 15
	BX120CS	018F4113	36	91			
	BX120CS	018F4114	71	180			
	BX120CS	018F4115	98	250			
	BX240CS	018F4122	18	46	208 – 240 230	60 50	14 17
	BX240CS	018F4123	98	250			

Design: In accordance with UL 429
Permissible voltage variation: Alternating current (a.c.): 0 % – -15 %
Power consumption: Alternating current (a.c.): Inrush: 49 VA
Holding: 28 VA, 16 W
Insulation of coil wire: Class H according to IEC 85
Enclosure, IEC 529: Junction box NEMA 2 ~ IP12–32 / Conduit boss NEMA 4 ~ IP54
Ambient temperature: -40 °F – 122 °F (-40 °C – 50 °C)

© Danfoss A/S (RC-MDP / MWA), 2014-04

Introduction

These Danfoss Clip-on coils are specially designed to operate in the aggressive environment of high humidity and temperature fluctuations that you find in most refrigeration systems.

The Clip-on fastening system ensures a faultless installation and makes the coils easy to mount and dismount. A Danfoss Clip-on coil can be mounted without any tools at all, and it is simple to dismount the coil by means of a screwdriver.

The Clip-on coils are available for the entire range of Danfoss solenoid valves for refrigeration, freezing and air conditioning purposes.



Features

- *Encapsulated coils with long operating life, even under extreme conditions*
- *Standard coils for a.c. or d.c.*
- *Standard coils available with DIN spade terminals and US 0.25" spade terminals*
- *Standard coils from 24 V to 240 V, 50, 60 or 50/60 Hz*
- *Standard coils dimensioned for max. opening differential pressure (MOPD) of up to 21 bar*
- *Coils can be fitted without the use of tools*

Approvals

U UL recognized with EVR, EVRA, EVM

Technical data

Ambient temperature
14 W a.c. coil for NC (normally closed) valve:
–40 → +122°F

14 W a.c. coil for NO (normally open) valve:
–40 → +122°F

20 W d.c. coil for NC and NO valve:
–40 → +122°F

Permissible voltage variation

14 W a.c. coils: +10/ –15%
20 W d.c. coils: ±10%.


Enclosure
IP 00

Connection

DIN plugs
Can be fitted with cable plugs according to DIN 43560-A

US spades
Can be fitted with cable plugs for US 0.25" spade terminals

Ordering



Valve type	Voltage	Frequency	Code number		Power consumption
	V	Hz	With DIN spade terminals	With US 0.25" spade terminals	
Alternating current a.c.					
EVR EVRA/EVRAT EVM	208 - 240	60	**018F7658**	**018F7661**	Holding: 14 W 21 VA Inrush: 44 V
	230	50	**018F7658**	**018F7661**	
	110	50/60	**018F7663**	**018F7660**	
	120	60	**018F7663**	**018F7660**	
	24	50/60	**018F7665**		

© Danfoss A/S (RC-MDP / MWA), 2014-04

Introduction

The coils are specially designed to operate in the aggressive environment of high humidity and temperature fluctuations that you find in most refrigeration systems.

The Clip-on fastening system ensures a faultless installation and makes the coils easy to mount and dismount. A Danfoss Clip-on coil can be mounted without any tools at all, and it is simple to dismount the coil by means of a screwdriver.

The Clip-on coils are available for the entire range of Danfoss solenoid valves for refrigeration, freezing and air conditioning purposes.



Features

- Encapsulated coils with long operating life, even under extreme conditions.
- Standard coils for a.c. or d.c.
- Standard coils available with 3-core cable, terminal box or DIN plugs.
- Standard coils from 12 V to 420 V, 50, 60 or 50/60 Hz.
- Standard coils dimensioned for max. opening differential pressure (MOPD)of up to 21 bar.
- Coils can be fitted without the use of tools.

Technical data

Ambient temperature
10 or 12 W a.c. coil for NC (normally closed) valve:
-40 – +80 °C -
10 W a.c. coil for NO (normally open) valve:
-40 – +55 °C
20 W coil for NC and NO valve:
-40 – +50 °C

Permissible voltage variation
10 , 12 and 20 W a.c. coils: +10 – -15 %
Double frequency coils and 20 W d.c. coils: ±10 %.

Enclosure
IP 67 with cable or terminal box
IP 20 with DIN plugs and protective cap
IP 65 with DIN socket
IP 00 with DIN plugs.

Approvals
See under the required solenoid valve.

Connection

3-core cable
The external thread in the screwed cable entry suits flexible steel hose or corresponding cable protection.


Terminal box
Leads are connected to terminal screws in the terminal box. The box is fitted with a Pg 13.5 screwed entry for 6 – 14 mm cable.
Max. lead cross section: 2.5 mm^2.

DIN plugs
The three pins on the coil can be fitted with spade tabs, 6.3 mm wide (to DIN 46247).
The two current carrying pins can also be fitted with spade tabs, 4.8 mm wide.
Max. lead cross section: 1.5 mm^2.
Use of the protective cap supplied will prevent inadvertent contact with live parts.

DIN socket
(to DIN 43650)
Leads are connected in the socket. The socket is fitted with a Pg 11 screwed entry for 6 – 12 mm.


© Danfoss A/S (RC-MDP / MWA), 2014-04

Ordering
Clip-on coils

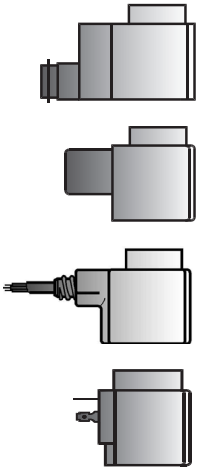

Valve type	Voltage V	Frequency Hz	Code no. 1 m 3-core cable IP 67	Code no. Terminal box IP 67	Code no. DIN plugs and protect. cap IP 20	Code no. DIN plugs *)	Power consumption
Alternating current a.c.							
EVR 2 – 40 (NC) EVR 6 – 22 (NO) EVRH 4 – 40 EVRC EVRA EVRAT EVRS / EVRST EVM (NC)	12	50	-	**018F6706**	-	-	Holding: 10 W 21 VA Inrush: 44 VA
	24	50	**018F6257**	**018F6707**	**018F6182**	**018F7358**	
	42	50	-	**018F6708**	-	-	
	48	50	-	**018F6709**	-	-	
	115	50	-	**018F6711**	-	**018F7361**	
	220-230	50	**018F6251**	**018F6701**	**018F6176**	**018F7351**	
	240	50	**018F6252**	**018F6702**	**018F6177**	**018F7352**	
	380-400	50	**018F6253**	**018F6703**	-	-	
	420	50	-	**018F6704**	**018F6179**	-	
	24	60	**018F6265**	**018F6715**	-	-	
	115	60	**018F6260**	**018F6710**	**018F6185**	-	
	220	60	**018F6264**	**018F6714**	**018F6189**	-	
	240	60	-	**018F6713**	-	-	
	110	50/60	**018F6280**	**018F6730**	**018F6192**	**018F7360**	
	220-230	50/60	**018F6282**	**018F6732**	**018F6193**	**018F7363**	

*) Can only be used with DIN socket



Valve type	Voltage V	Frequency Hz	Code no. Terminal box	Power consumption
Alternating current a.c.				
EVR 3 – 40 EVRC EVRA EVRAT EVRS / EVRST EVM (NC / NO)	24	50	**018F6807**	Holding: 12 W 26 VA Inrush: 55 VA
	48	50	**018F6809**	
	110	50	**018F6811**	
	220-230	50	**018F6801**	
	240	50	**018F6802**	
	380-400	50	**018F6803**	
	24	60	**018F6815**	
	110	60	**018F6813**	
	220	60	**018F6814**	



Alternating current a.c.					
EVR 2 – 40 (NC) EVR 6 – 22 (NO) EVRH 4 – 40 (NO) EVRC/EVRA/EVRAT/ EVRST/ EVM (NC)	24	50	**018F6901**	Holding: 20 W 45VA Inrush: 65VA	Recommended use for EVRH with high MOPD (38 bar)
	24	50	**018F6905**		
	230	60	**018F6902**		

See "Opening differential pressure" under "Technical data" for the valve concerned.

When replacing a coil with terminal box, it is sufficent to change the coil unit itself. Therefore, order coil with DIN plugs and protective cap.

© Danfoss A/S (RC-MDP / MWA), 2014-04

Ordering *(Continued)*




Valve type	Voltage V	Code no. Terminal box IP 67	Power consumption
Direct current d.c.			Coil type I
EVR 2 – 15 (NC) EVR 25 – 40 (NC/NO) EVR 6 – 15 (NO) EVRC 10 – 15 EVRA 3 – 15 (NC) EVRA 25 – 40 (NC) EVRAT 10 – 15 (NC) EVRS / EVRST 3 – 15 EVM (NC/NO)	12	**018F6856**	20 W
	24	**018F6857**	
	48	**018F6859**	
	110	**018F6860**	
	115	**018F6861**	
	220	**018F6851**	
Direct current d.c.			Coil type II
EVR 20 – 22 (NC/NO) EVRC 20 EVRA 20 EVRAT 20 EVRST 20	12	**018F6886**	20 W
	24	**018F6887**	
	48	**018F6889**	
	110	**018F6890**	
	220	**018F6881**	



See "Opening differential pressure" under "Technical data" for the valve concerned.

When replacing a coil with terminal box, it is sufficent to change the coil unit itself. Therefore, order coil with DIN plugs and protective cap.


Accessories




Description	Code no.
DIN socket	**042N0156**
Terminal box with build-in light emmiting indicator diode for solenoid valves	**018Z0089**

Dimensions and weights
See under the required solenoid valve.


Dimension and weight

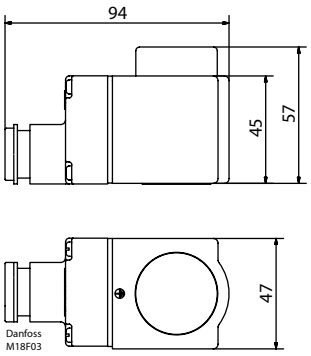


Terminal box 10 - 12 W
Weight 0.29 Kg / 0.6 lbs



Cable 10 - 12 W
Weight 0.29 Kg / 0.6 lbs



DIN socket 10 - 12 W
Weight 0.24 Kg / 0.5 lbs

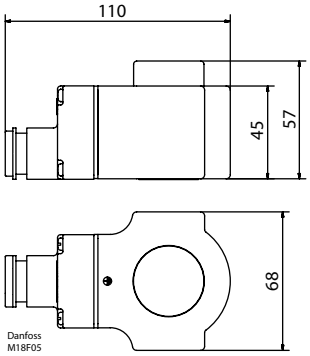

Terminal box 20 W
Weight 0.55 Kg / 1.2 lbs

© Danfoss A/S (RC-MDP / MWA), 2014-04

Coils for solenoid valves (ATEX) - Type BV

ATEX approved coils is a range of coils for use in EX zone 2. The coils are suitable for the Danfoss solenoid valve range and cover the standard voltage and frequency used in the market.



Features

- ATEX approved for use in EX zone 2
- Embedded coils with long lifetime - even under extreme conditons
- Available with 1 m 3-core cable
- Safe mounting with screw-on system
- Standard coils from 24 V to 240 V a.c.
- Standard coils dimensioned to max. opening differential pressure (MOPD) up to 21 bar for a.c.

Approval

Ex nA IIB T4 Gc
EN 60079-0 and EN 60079-15

Technical data

Ambient temperature

- 11 W, 50 Hz/60 Hz a.c. coil: -20 °C – +50 °C

Temperature of medium

- max. 100 °C

Enclosure for coil

- IP 65

Permissible voltage variation

- 11 W a.c. coils, 50 Hz: +10 to -15%
- 11 W a.c. coils, 60 Hz: +/- 10%

Polution degree

- 3

Connections

3-core cable
The external thread of the cable entry is suitable for flexible steel hose or similar cable protection


Note:
Always install a fuse ahead of the coil.
It should not exceed 2 A for coils rated less than 50 V and it should not exceed 1 A for coils rated 50 V or more. Time log: Medium.

© Danfoss A/S (RC-MDP / MWA), 2014-04

Ordering

Coil for valve type	Coil type	Voltage V	Frequency Hz	Code no. With 1 m cable	Power consumption
Alternating current a.c.					
EVR 2 – EVR 40 (NC) EVR 6 – EVR 22 (NO) EVRC EVRA/ EVRAT EVRS / EVRST EVM (NC / NO)	BV024A	24	50	**018Z6120**	Holding 11 W 21 VA Inrush 44 VA
	BV110A	110	50	**018Z6121**	
	BV230A	230	50	**018Z6122**	
	BV240A	240	50	**018Z6123**	
	BV024B	24	60	**018Z6125**	
	BV230B	230	60	**018Z6127**	

Dimensions and weights

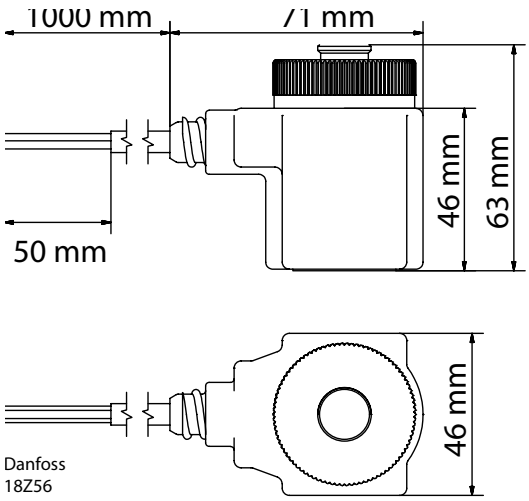

Weight: 0.5 Kg

Danfoss can accept no responsibility for possible errors in catalogues, brochures and other printed material. Danfoss reserves the right to alter its products without notice. This also applies to products already on order provided that such alterations can be made without subsequential changes being necessary in specifications already agreed.
All trademarks in this material are property of the respective companies. Danfoss and the Danfoss logotype are trademarks of Danfoss A/S. All rights reserved.

© Danfoss A/S (RC-MDP / MWA), 2014-04